



**Opto Plus LED Corp.**  
**0.3" Case Mold Type LED Display**  
**OPD-D3010UPG | OPD-D3011UPG**

● **EDIT HISTORY**

Version A : Nov. 04, 2020

Preliminary Spec.



# Opto Plus LED Corp.

## 0.3" Case Mold Type LED Display

### OPD-D3010UPG | OPD-D3011UPG

#### ● FEATURES

- 0.3 inch (7.62 mm) Digit Height.
- Low current operation.
- Case mold type.
- RoHS compliant, Pb Free.

#### ● DESCRIPTION

The device are 0.3 inch (7.62 mm) height dual digit 7-segment displays

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Pure Green LED chip which are made from InGaN on a transparent GaN substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

#### ● DEVICE

	PART NO.	DESCRIPTION
	OPD-D3010UPG-GW	Common Anode   Gray face   White segment
	OPD-D3011UPG-GW	Common Cathode   Gray face   White segment
	OPD-D3010UPG-BW	Common Anode   Black face   White segment
	OPD-D3011UPG-BW	Common Cathode   Black face   White segment

#### RoHS Compliance



#### Pb Free.






# Opto Plus LED Corp.

## 0.3" Case Mold Type LED Display


### OPD-D3010UPG | OPD-D3011UPG

#### ● MECHANICAL DIMENSIONS

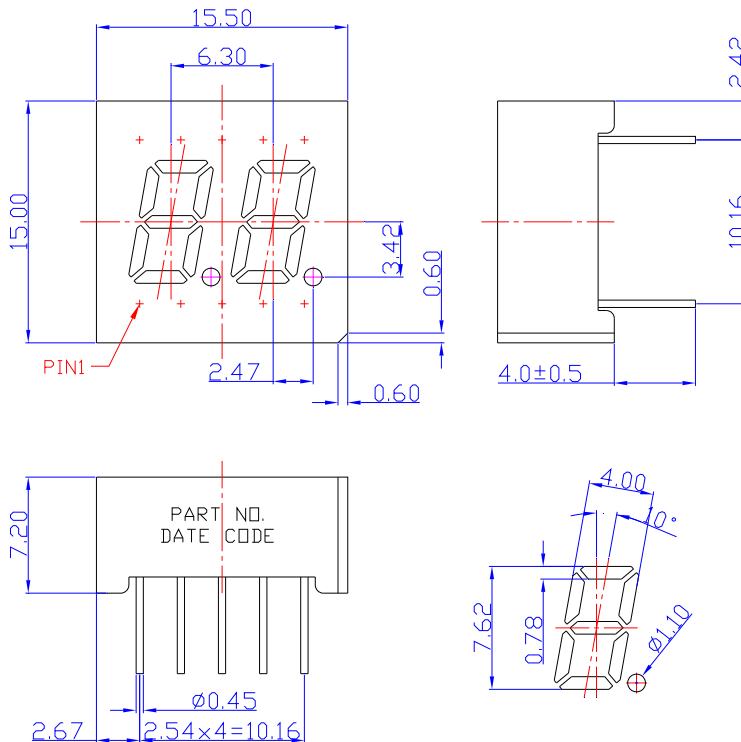

NOTES: Dimension is in millimeters. Tolerance is ± 0.25 mm unless otherwise noted.

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

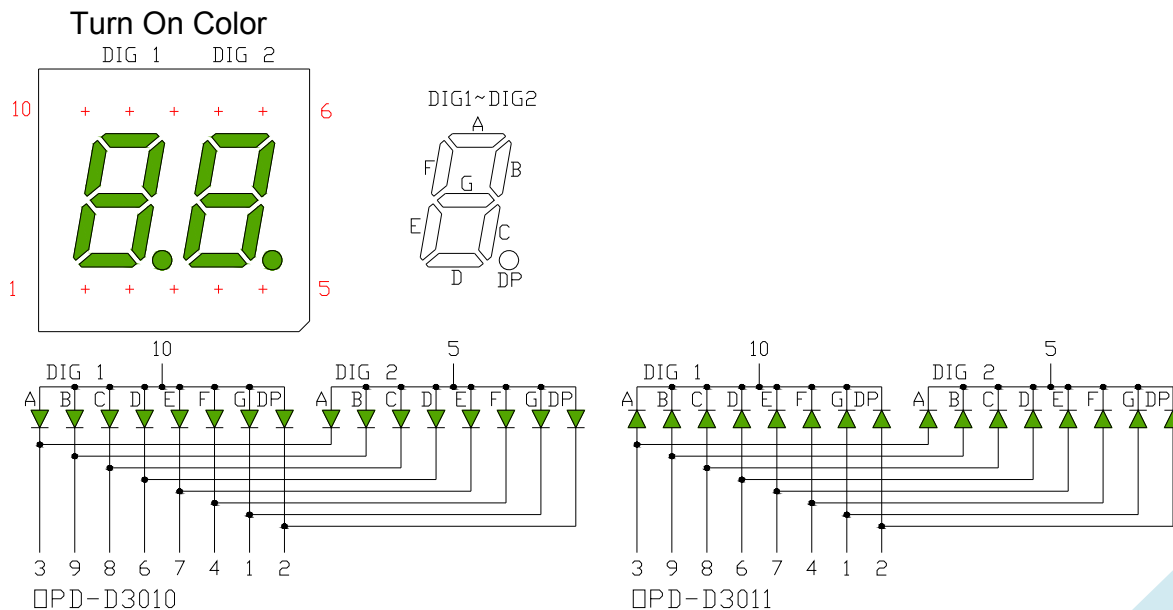

※EMITTED COLOR : PURE GREEN

Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)  
 Website: [www.opledtw.com](http://www.opledtw.com) E-mail: [sales@opledtw.com](mailto:sales@opledtw.com) Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:  
 Subject to change without notice

FM-RD-006A



**Opto Plus LED Corp.**  
**0.3" Case Mold Type LED Display**  
**OPD-D3010UPG | OPD-D3011UPG**

● **UPG: PURE GREEN (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P <sub>AD</sub>	68	mW
Continuous forward current	I <sub>AF</sub>	20	mA
Peak current (duty cycle 1/10, 1kHz)	I <sub>PF</sub>	60	mA
Reverse voltage	V <sub>R</sub>	5	V
Operating temperature	T <sub>OPR</sub>	-40 to +85	°C
Storage temperature	T <sub>STG</sub>	-40 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C



Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA	-	2.8	3.2	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V	-	-	10	μA
Dominant Wavelength	λ <sub>D</sub>	I <sub>F</sub> =20mA	515	525	530	nm
Luminous Intensity	I <sub>V</sub>	I <sub>F</sub> =20mA	-	200	-	mcd
Spectral Line Half-Bandwidth	Δλ	I <sub>F</sub> =20mA	-	30	-	nm



## Opto Plus LED Corp. 0.3" Case Mold Type LED Display OPD-D3010UPG | OPD-D3011UPG

### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPD-D3010UPG-GW	Common Anode   Gray face   White segment
OPD-D3011UPG-GW	Common Cathode   Gray face   White segment
OPD-D3010UPG-BW	Common Anode   Black face   White segment
OPD-D3011UPG-BW	Common Cathode   Black face   White segment



# Opto Plus LED Corp.

## 0.3" Case Mold Type LED Display

### OPD-D3010UPG | OPD-D3011UPG

#### ● UPG: PURE GREEN (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

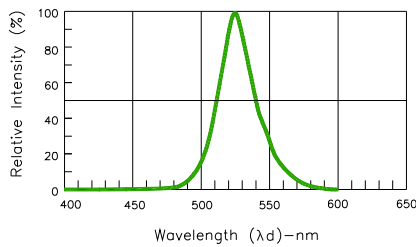


Fig.-1 Relative Intensity VS. Wavelength

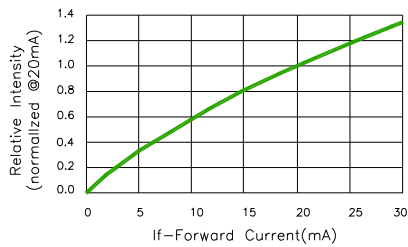


Fig.2-Relative Luminous Intensity vs. Forward Current

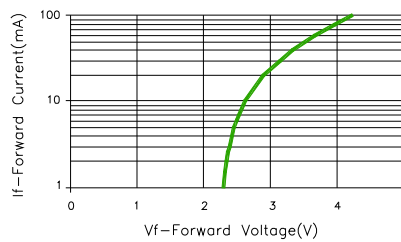


Fig.3-Forward Current vs. Forward Voltage

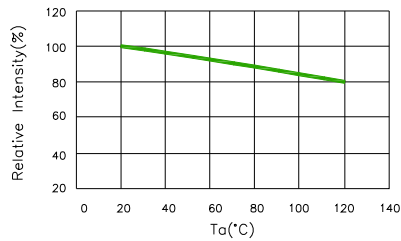


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

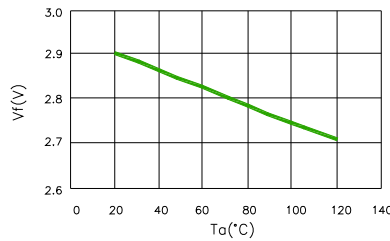


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

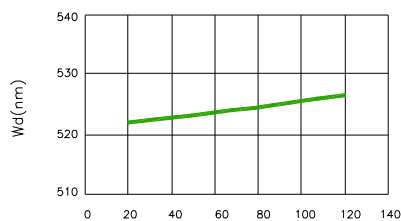


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature


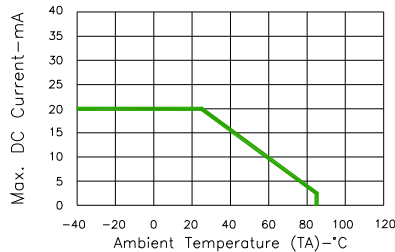


Fig.7-Max. Allowable DC Current VS. Ambient Temperature

● **RECOMMEND SOLDERING PROFILE**

WAVE SOLDER PROFILE

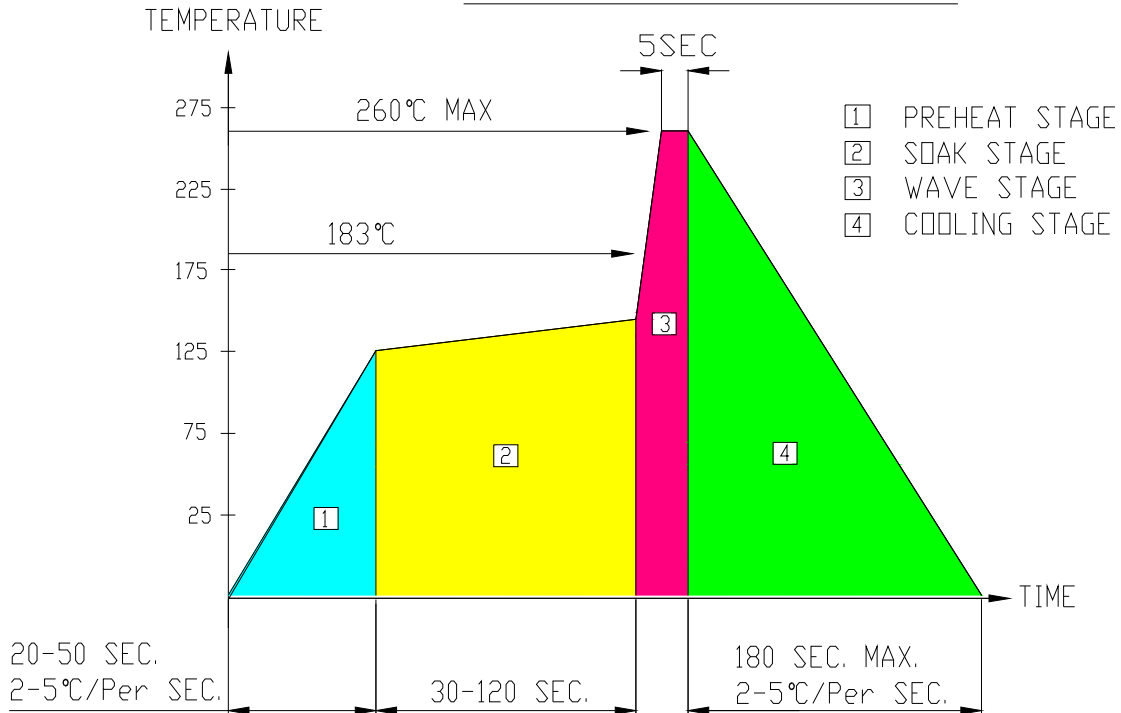

● **Note:**

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

● **SOLDERING IRON**

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

Customer must finish rework within  $\leq 3$  sec under 350°C.  
 The head of soldering iron cannot touch copper foil.