



Opto Plus LED Corp.
OPL-3014LRD-30
3 mm Dia LED Lamp

● **EDIT HISTORY**

Version A: Feb. 17, 2021

Preliminary Spec.



Opto Plus LED Corp.

OPL-3014LRD-30

3 mm Dia LED Lamp


● FEATURES

- Low power consumption.
- High efficiency
- Round type
- With Flange
- Solder leads without stand-off
- Compliant with RoHs

● DESCRIPTION

- Chip Material : AlGaInP/GaAs
- Emitting Color : Ultra Red
- Lens Color : White Diffused

● PACKAGE DIMENSIONS

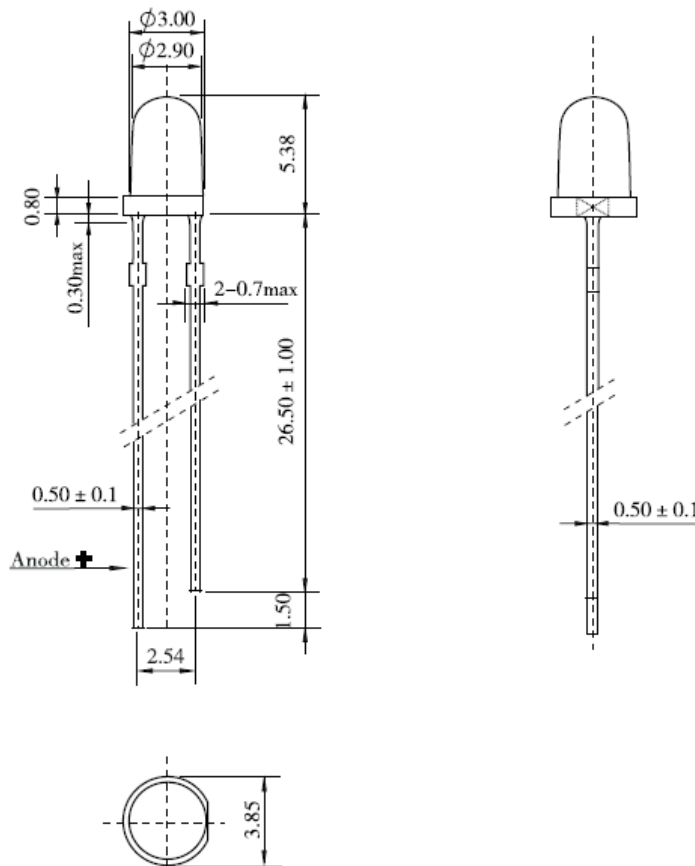

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice



Opto Plus LED Corp.

OPL-3014LRD-30

3 mm Dia LED Lamp

● LR: SUPER RED (AlGaInP/GaAs)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Ultra Red	Unit
Power dissipation	P _{AD}	80	mW
Reverse voltage	V _R	5	V
Continuous forward current	I _{AF}	30	mA
Temperature coefficient	I/C	0.4	mA/°C
Pulse current	I _{PF}	100	mA
Operating temperature	T _{OPR}	-25 to +85	°C
Storage temperature	T _{STG}	-40 to +100	°C
Soldering Condition	T _{sd}	260°C/5set	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V _F	I _F =20mA	-	2.0	2.4	V
Reverse current	I _R	V _R =5V	-	-	50	μA
Peak wavelength	λ _P	I _F =20mA	-	645	-	nm
Dominant wavelength	λ _D	I _F =20mA	-	635	-	nm
Luminous intensity	I _V	I _F =20mA	72.8	145	-	mcd
Spectral radiation bandwidth	Δλ	I _F =20mA	-	20	-	nm
Viewing Angle	2θ 1/2	I _F =20mA	-	30	-	deg








Opto Plus LED Corp.

OPL-3014LRD-30

3 mm Dia LED Lamp


● LR: SUPER RED (AlGaInP/GaAs)

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

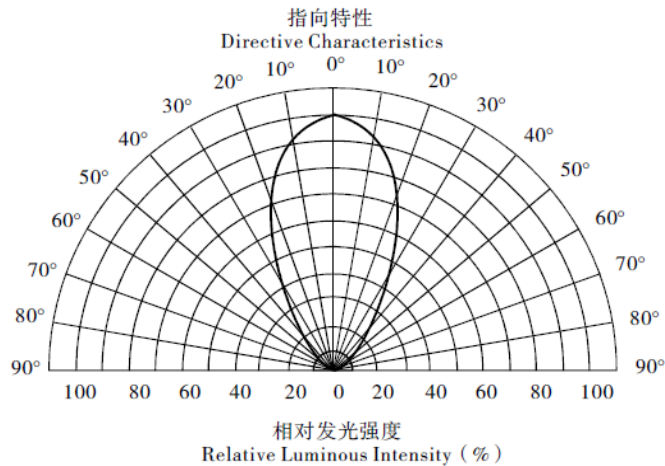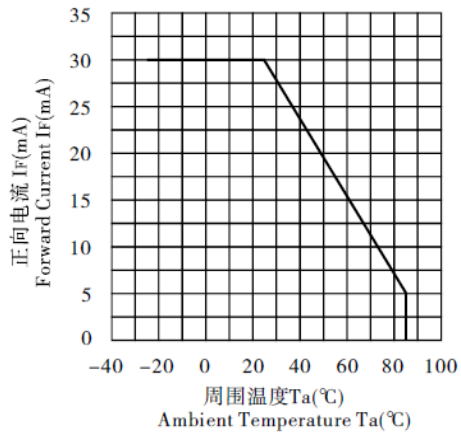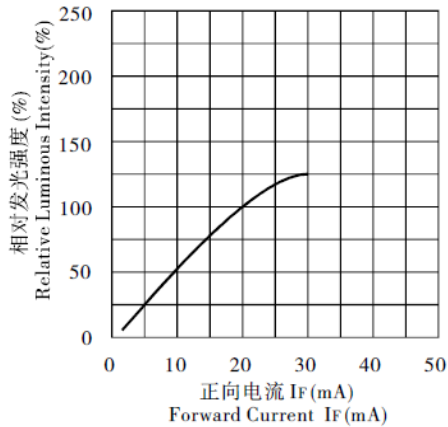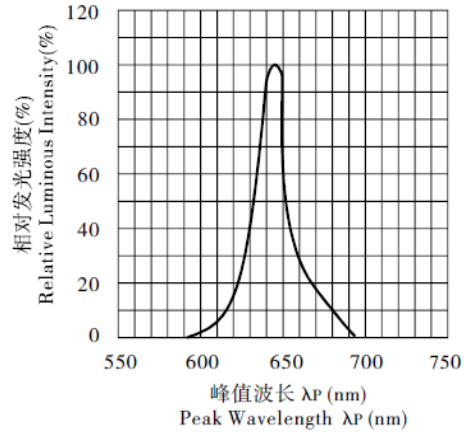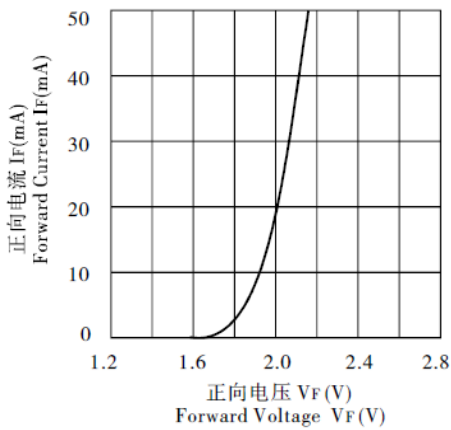

● **RECOMMEND SOLDERING PROFILE**

WAVE SOLDER PROFILE

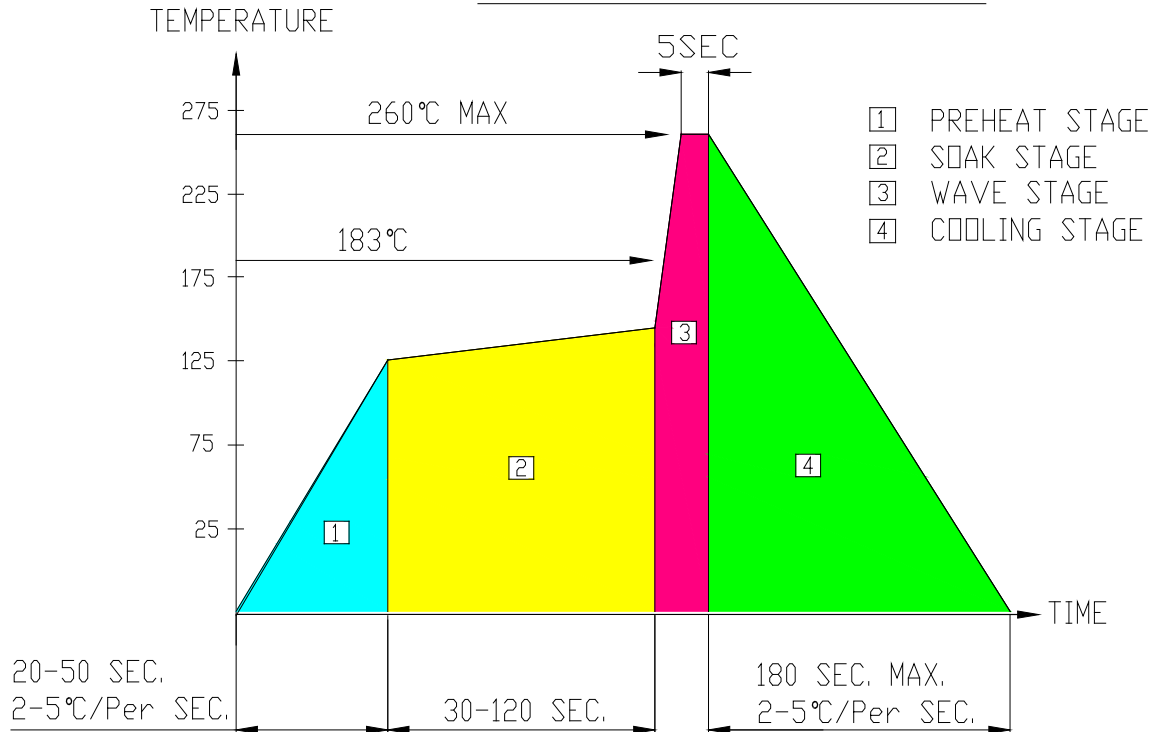

● **Note:**

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

Customer must finish rework within ≤ 3 sec under 350°C. The head of soldering iron cannot touch copper foil.