Opto Plus LED Corp.
0.30” Case Mold Type LED Display
OPD-AD3020LE | OPD-AD3021LE

EDIT HISTORY

Version A: Jun. 30, 2022

Preliminary Spec.

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice

www.opledtw.com

Opto Plus LED Corp.
0.30” Case Mold Type LED Display
OPD-AD3020LE | OPD-AD3021LE

FEATURES

- 0.30 inch (7.62 mm) Digit Height.
- Low current operation.
- Case mold type.
- RoHS compliant, Pb Free.

DESCRIPTION

The device are 0.30 inch (7.62 mm) height dual character alphanumeric display.

height dual digits display

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Red LED chip which are made from AlGaInP on a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

DEVICE

	PART NO.	DESCRIPTION
	OPD-AD3020LE-GW	Common Anode | Gray face | White segment
	OPD-AD3021LE-GW	Common Cathode | Gray face | White segment
	OPD-AD3020LE-GW	Common Anode | Black face | White segment
	OPD-AD3021LE-BW	Common Cathode | Black face | White segment

RoHS Compliance

Pb Free.

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice

Opto Plus LED Corp.
0.30” Case Mold Type LED Display
OPD-AD3020LE | OPD-AD3021LE

● MECHANICAL DIMENSIONS

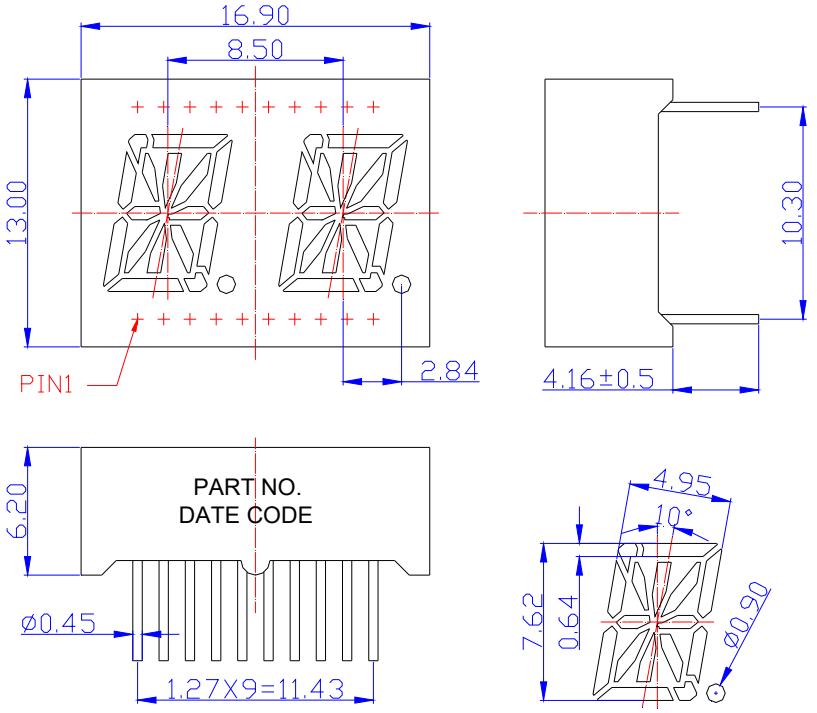

NOTES: Dimension is in millimeters. Tolerance is ± 0.25 mm unless otherwise noted.

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

Turn On Color

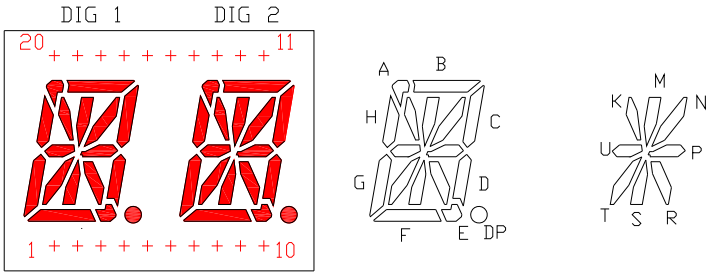

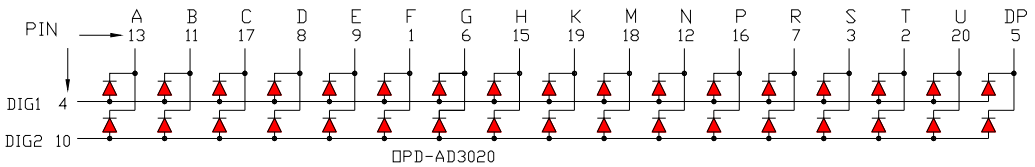

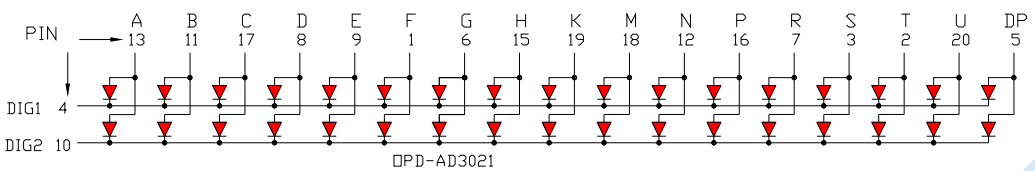

※EMITTED COLOR：SUPER BRIGHT RED

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice

LE: SUPER BRIGHT RED (AlGaInP/GaAs)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P_{AD}	48	mW
Continuous forward current	I_{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I_{PF}	40	mA
Reverse voltage	V_R	5	V
Operating temperature	T_{OPR}	-40 to +85	°C
Storage temperature	T_{STG}	-40 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage	V_F	I_F =20mA	-	2.1	2.4	V
Reverse Current	I_R	V_R =5V	-	-	10	μA
Peak Wavelength	λ_P	I_F =20mA	-	632	-	nm
Dominant Wavelength	λ_D	I_F =20mA	619	624	629	nm
Luminous Intensity	I_V	I_F =20mA	-	40	-	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	I_F =20mA	-	20	-	nm

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer’s request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPD-AD3020LE-GW	Common Anode ｜ Gray face ｜ White segment
OPD-AD3021LE-GW	Common Cathode ｜ Gray face ｜ White segment
OPD-AD3020LE-BW	Common Anode ｜ Black face ｜ White segment
OPD-AD3021LE-BW	Common Cathode ｜ Black face ｜ White segment

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice

● LE: SUPER BRIGHT RED (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25℃ Free Air Temperature Unless Otherwise Specified)

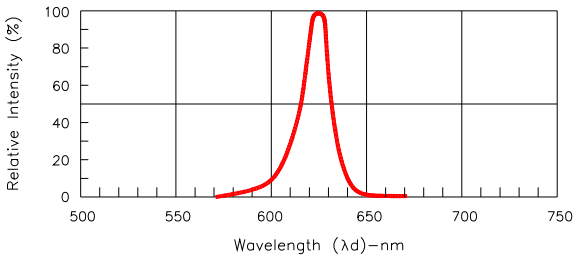

Fig.1—Relative Intensity VS. Wavelength

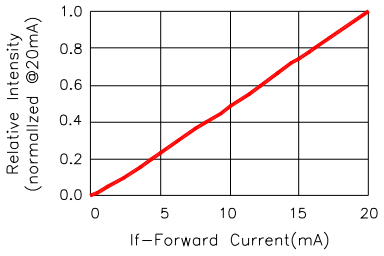

Fig.2—Relative Luminous Intensity vs. Forward Current

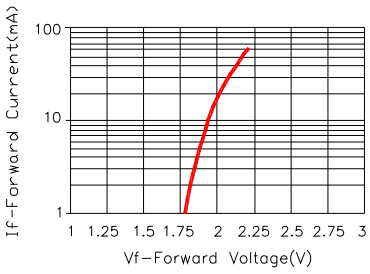

Fig.3—Forward Current vs. Forward Voltage

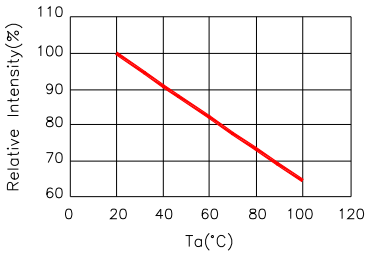

Fig.4—Relative Intensity(@20mA) vs. Ambient Temperature

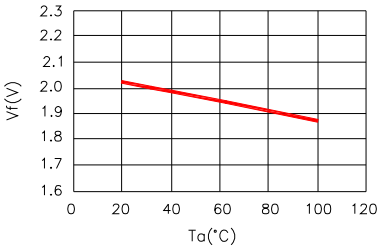

Fig.5—Forward Voltage(@20mA) vs. Ambient Temperature

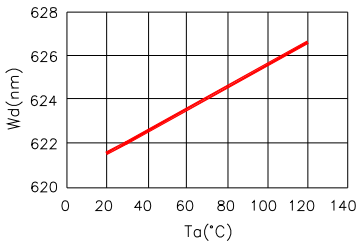

Fig.6—Dominant Wavelength(@20mA)
VS. Ambient Temperature

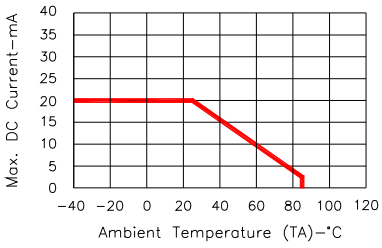

Fig.7—Max. Allowable DC Current
VS. Ambient Temperature

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice

RECOMMEND SOLDERING PROFILE

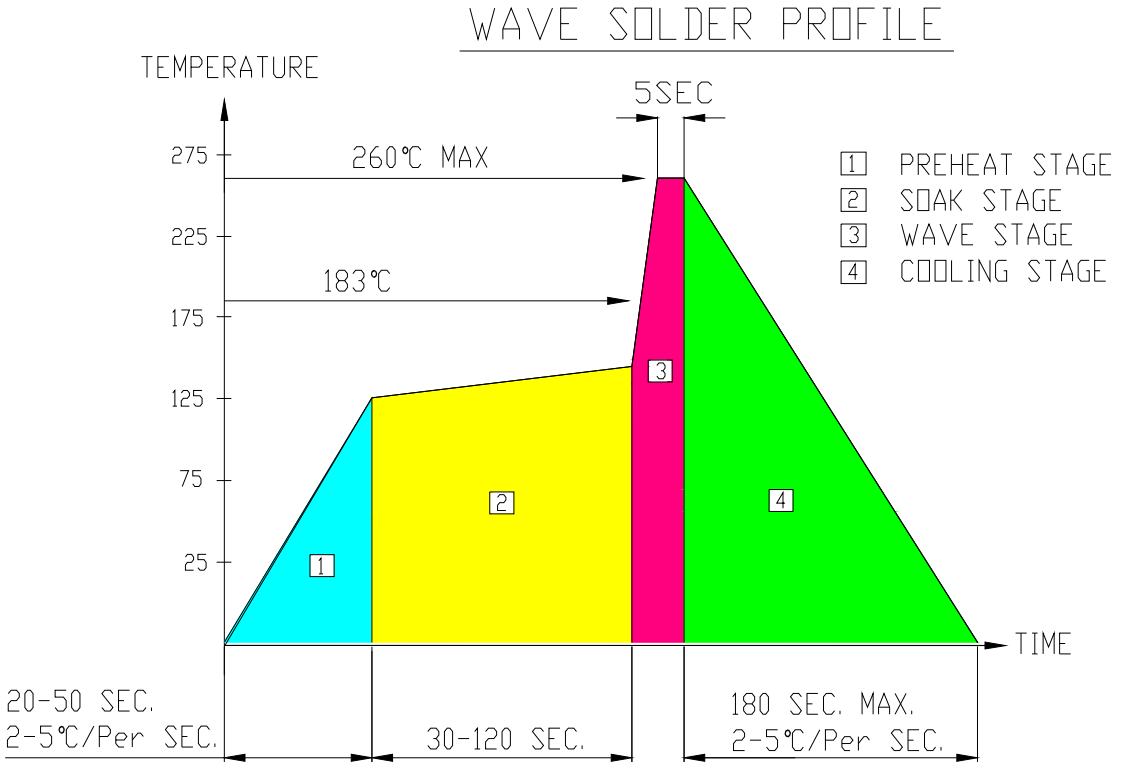

Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

SOLDERING IRON

Basic spec is ≦4 sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

REWORK

Customer must finish rework within ≦3 sec under 350°C.
The head of soldering iron cannot touch copper foil.

Opto Plus LED Corp. 7F-3, No.496 , Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566

Disclaimer:
Subject to change without notice