



Opto Plus LED Corp.
Case Mold Type LED Display
OPD-DR54LYLB-Z-W

● **EDIT HISTORY**

Version A: May. 23, 2023
Preliminary Spec.

Prepared by	Checked by	Approved by



Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W


INTERNAL FEATURES

1. One Circle Two Color.
2. Ø 54.3mm Case Mold Type LED Display
3. Ø 44.5mm Hollow Circle.
4. PIN 1 & PIN 3 Description : Supply voltage terminal.
5. PIN 2 & PIN 4 Description : Ground terminal.
6. Operating Voltage Range : 2.7 ~ 5V. (Blue Color)
7. Operating Voltage Range : 1.6 ~ 5V. (Yellow Color)
8. Operating Current Range : 112 ~ 150mA. (Blue Color)
9. Operating Current Range : 125 ~ 142mA. (Yellow Color)
10. Operating temperature: -25°C to +85°C

Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of the devices at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W



● MECHANICAL DIMENSIONS

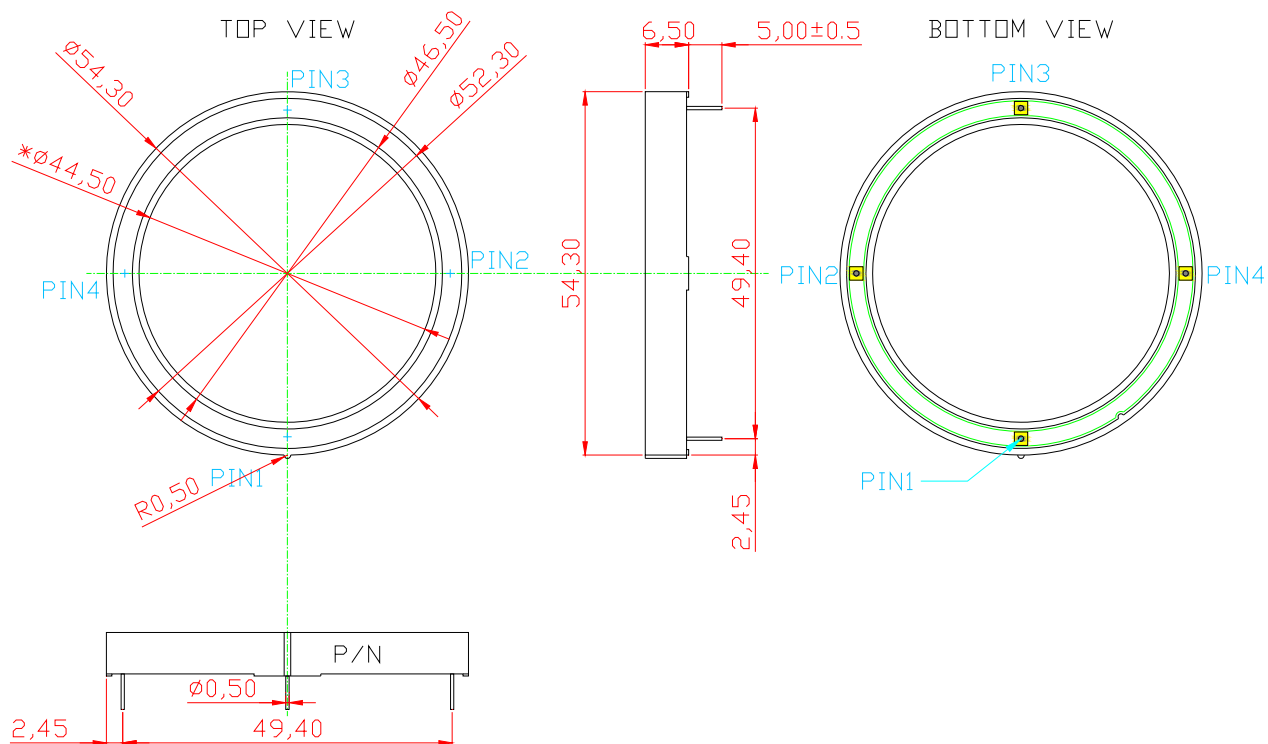


NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

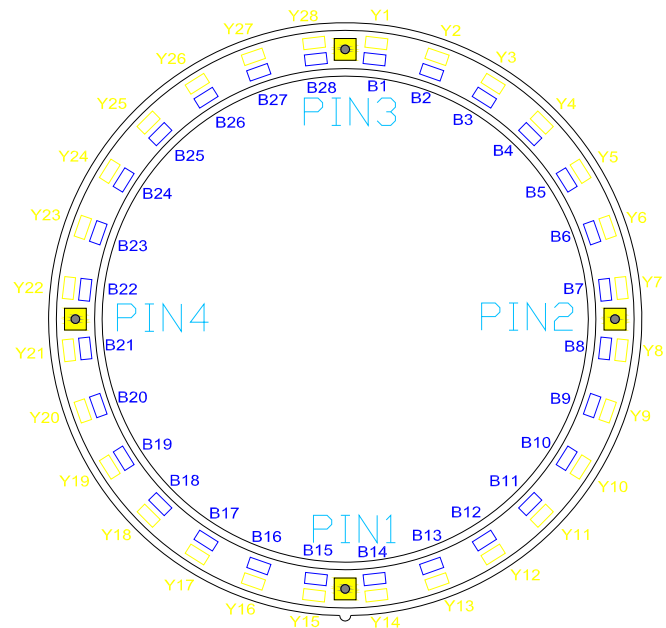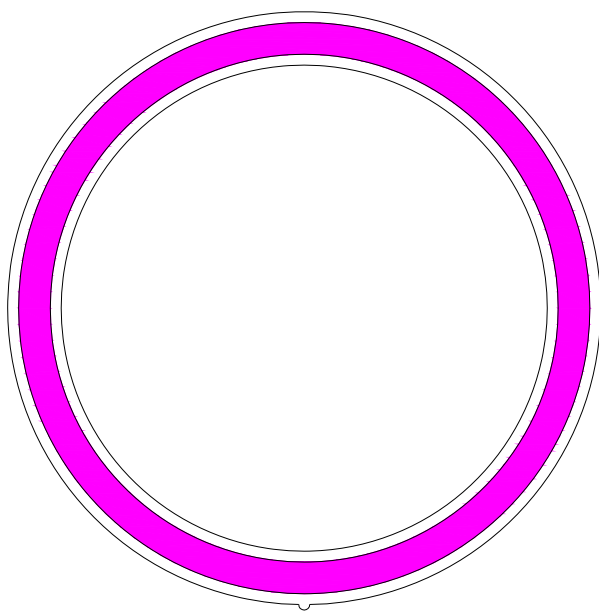


PIN3

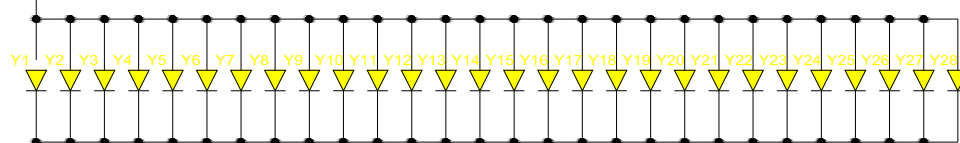

PIN4

Super Bright Yellow SMD LED

PIN1

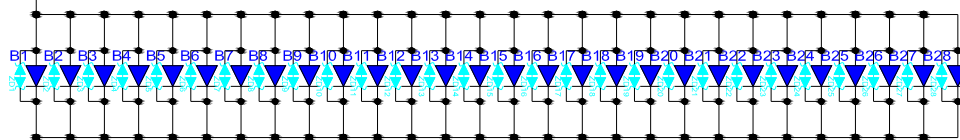

PIN2

Super Bright Blue SMD LED With Zener Diode

Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W

● LY: SUPER BRIGHT YELLOW (Y1-Y28)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Super Bright Yellow	Unit
Power dissipation	P _{AD}	240	mW
Continuous forward current	I _{AF}	120	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-25 to +85	°C
Storage temperature	T _{STG}	-25 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V _F	I _F = 120mA	1.6	1.8	2.0	V
Reverse current	I _R	V _R = 5V	-	-	10	μA
Peak wavelength	λ _P	I _F = 120mA	-	591	-	nm
Dominant Wavelength (per SMD)	λ _D	I _F = 120mA	-	589	-	nm
Luminous intensity (per SMD)	I _V	I _F = 120mA	-	336	-	mcd
Spectrum Radiation Bandwidth	Δλ	I _F = 120mA	-	20	-	nm

Note: It maintains a tolerance of ±10% on VF Bin



Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W

● AVAILABLE BIN / HUE TABLE

2S2Q	2S2R	2S3Q	2S3R
3S2Q	3S2R	3S3Q	3S3R
2T2Q	2T2R	2T3Q	2T3R
3T2Q	3T2R	3T3Q	3T3R

● LY: BIN GRADE (Unit : mcd)

S	T
232.0 – 335.9	336.0 – 490.0

● LY: HUE GRADE (λD : nm)

2	3
584 - 589	590 - 595

Note: It maintains a tolerance of $\pm 0.5\text{nm}$ on Color Bin.

Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W

● LB: Super bright blue (B1-B28)

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Super Bright Blue	Unit
Power dissipation	P _{AD}	468	mW
Continuous forward current	I _{AF}	120	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-25 to +85	°C
Storage temperature	T _{STG}	-25 to +85	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V _F	I _F = 120mA	2.7	3.3	3.9	V
Reverse current	I _R	V _R = 5V	-	-	10	μA
Peak wavelength	λ _P	I _F = 120mA	-	468	-	nm
Dominant Wavelength (per SMD)	λ _D	I _F = 120mA	-	470	-	nm
Luminous intensity (per SMD)	I _v	I _F = 120mA	-	192	-	mcd
Spectrum Radiation Bandwidth	Δλ	I _F = 120mA	-	40	-	nm

Note: It maintains a tolerance of ±10% on VF Bin




Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W


Temperature and Humidity Bias 60°C 90%R.H 20mA Operation Test Time
1000hrs (Per Blue SMD LED)

LIFE TIME

25°C 20mA

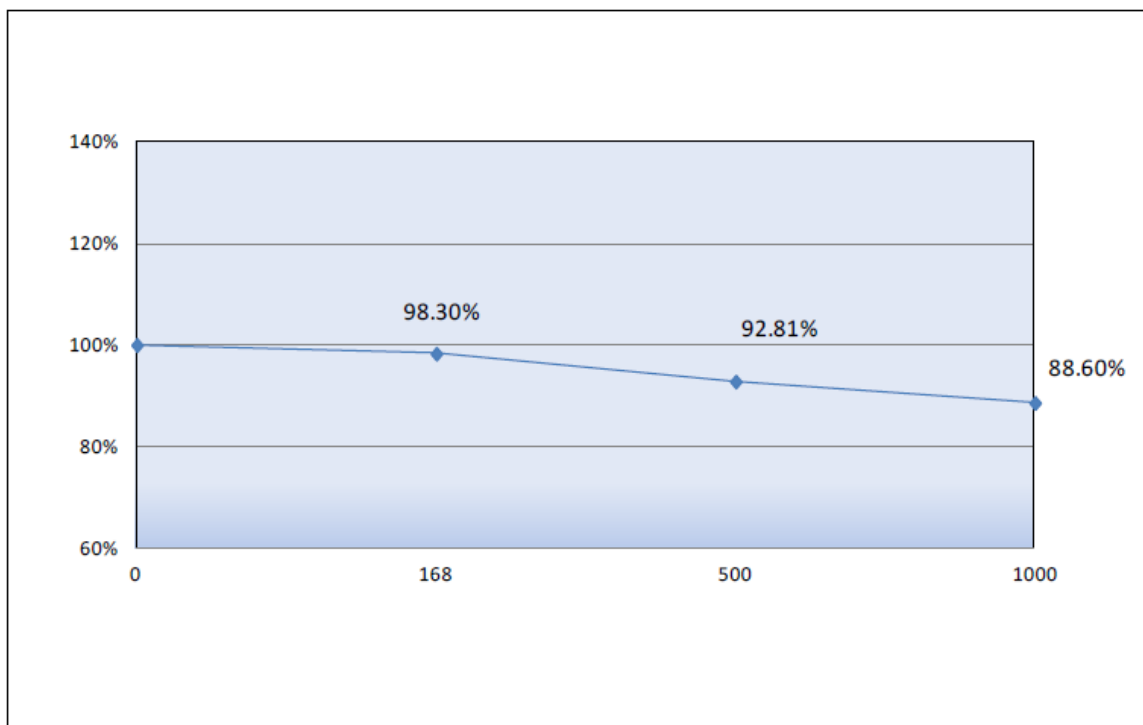

Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W

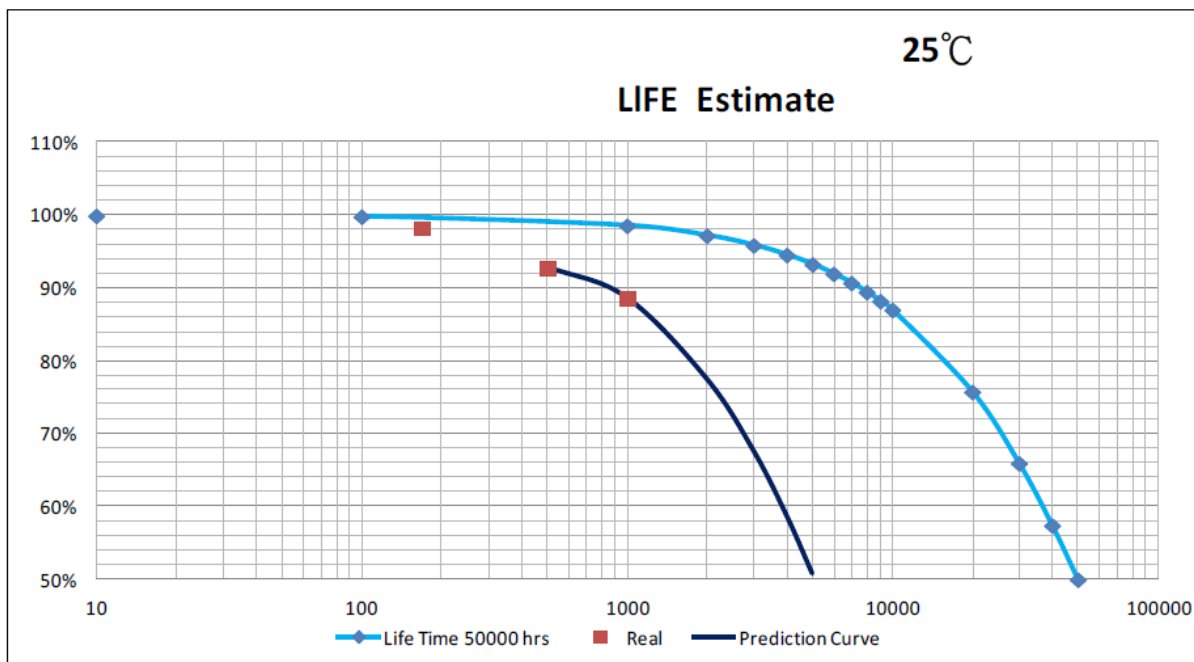

● LB: BIN GRADE (Unit : mcd)


Q	R
159.0 – 191.9	192.0 – 232.0

● LB: HUE GRADE (λ_D : nm)

2	3
464 - 467	468 - 472

Note: It maintains a tolerance of $\pm 0.5\text{nm}$ on Color Bin.

● RECOMMEND SOLDERING PROFILE

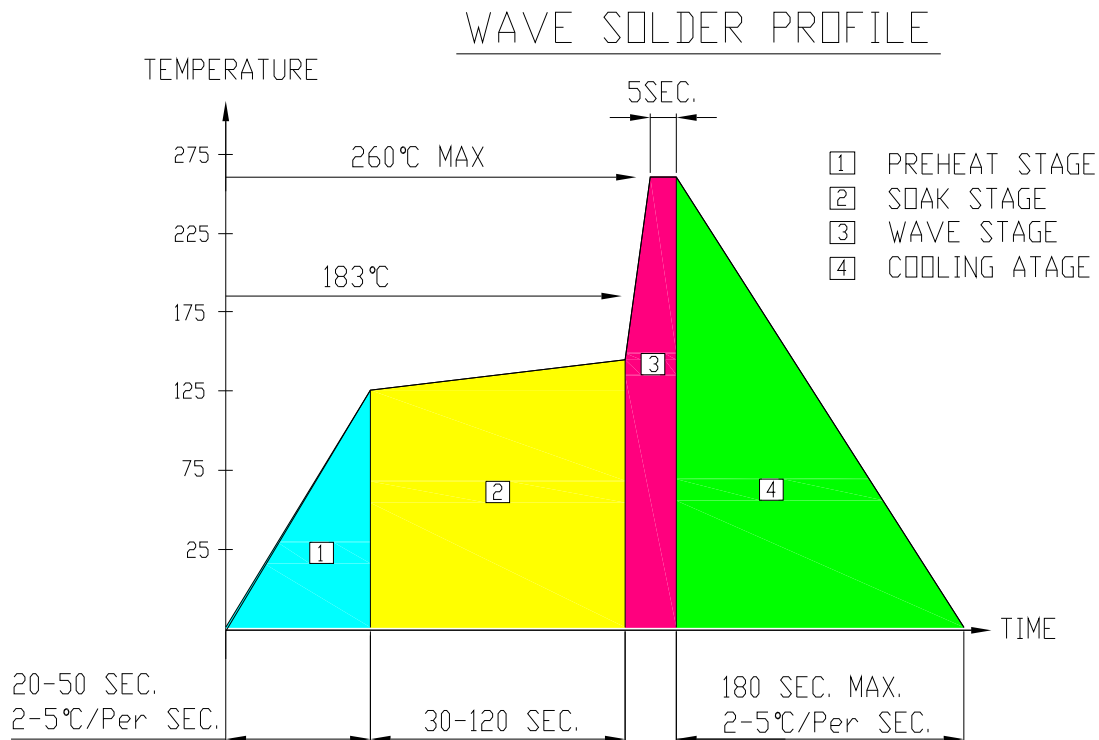

● Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● REWORK


Customer must finish rework within ≤ 3 sec under 350°C.
 The head of soldering iron cannot touch copper foil.

Opto Plus LED Corp. Case Mold Type LED Display OPD-DR54LYLB-Z-W

● PACKAGE DIMENSIONS


30 PCS / 1 ESD TRAY.

180 PCS / 6 ESD TRAY / TOP & BOTTOM 1 Corrugates Paper / 1 PINK ESD BAG.




BAG SIZE :450X410X560

180 PCS / 1 Inner Carton.

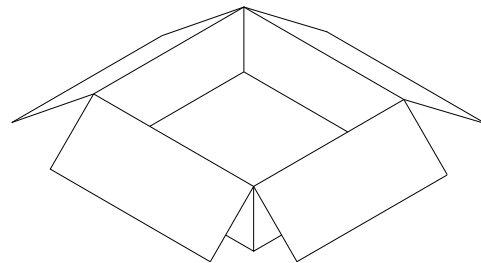

INNER BOX SIZE : 394 x 370 x 138 mm

360 PCS / 2 Inner Carton / 1 Outer Carton.

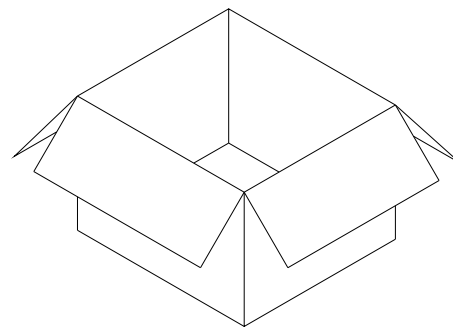

OUTER BOX SIZE : 430 x 390 x 300 mm

● Note:

LED DISPLAY STANDARD STORAGED CONDITION

Product in the original packaging material state is the recommended storage conditions.

TERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

If the storage conditions do not meet specification standards, the component pins may become oxidized requiring re-plating and re-sorting before use. Suggest customers consume LEDs as soon as possible, and avoid long-term storage of large inventories.