



Opto Plus LED Corp.

OPL-3014YGT-30

3 mm Dia LED Lamp

● EDIT HISTORY

Version A : Feb. 17, 2021

Preliminary Spec.



Opto Plus LED Corp.

OPL-3014YGT-30

3 mm Dia LED Lamp


● FEATURES

- Low power consumption.
- High efficiency
- Round type
- With Flange
- Solder leads without stand-off
- Compliant with RoHs

● DESCRIPTION

- Chip Material : AlGaInP/GaAs
- Emitting Color : Ultra Green
- Lens Color : Green Transparent

● PACKAGE DIMENSIONS

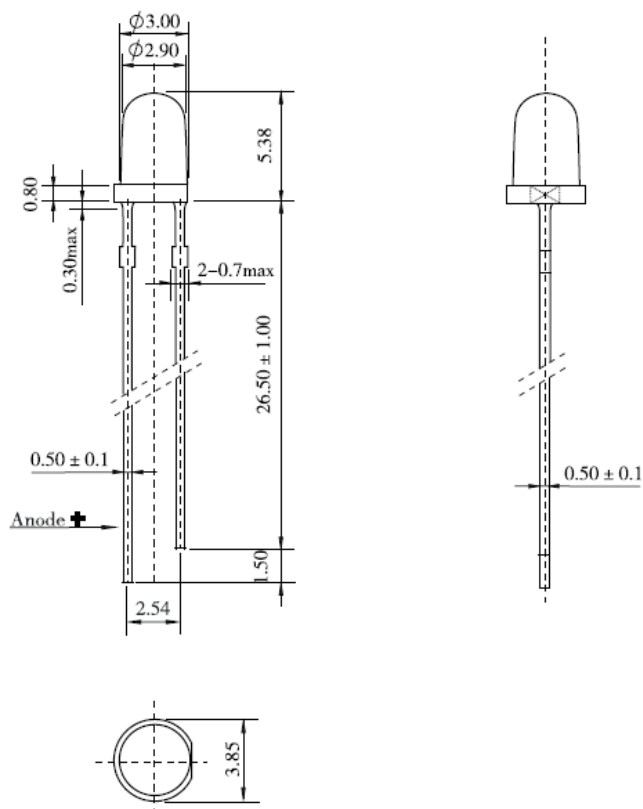



Opto Plus LED Corp.

OPL-3014YGT-30

3 mm Dia LED Lamp

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

● YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs)

ABSOLUTE MAXIMUM RATING AT $T_a=25^\circ\text{C}$





Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P_{AD}	80	mW
Reverse voltage	V_R	5	V
Continuous forward current	I_{AF}	30	mA
Temperature coefficient	I/C	0.33	mA/ $^\circ\text{C}$
Pulse current	I_{PF}	100	mA
Operating temperature	T_{OPR}	-25 to +85	$^\circ\text{C}$
Storage temperature	T_{STG}	-40 to +100	$^\circ\text{C}$
Soldering Condition	T_{sd}	260 $^\circ\text{C}$ /5set	$^\circ\text{C}$

ELECTRICAL - OPTICAL CHARACTERISTICS AT $T_a=25^\circ\text{C}$

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V_F	$I_F = 20\text{mA}$	-	2.0	2.4	V
Reverse current	I_R	$V_R = 5\text{V}$	-	-	50	μA
Peak wavelength	λ_P	$I_F = 20\text{mA}$	-	572	-	nm
Dominant Wavelength	λ_D	$I_F = 20\text{mA}$	-	571	-	nm
Luminous intensity	I_v	$I_F = 20\text{mA}$	-	700	-	mcd
Spectral radiation bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm
Viewing Angle	$2\theta_{1/2}$	$I_F = 20\text{mA}$	-	30	-	deg

● YG: SUPER BRIGHT YELLOW GREEN (AlGaInP/GaAs) CURVE


Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

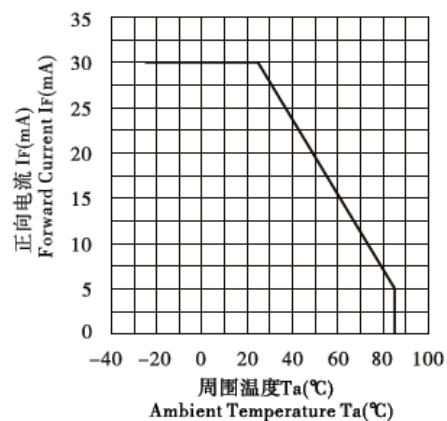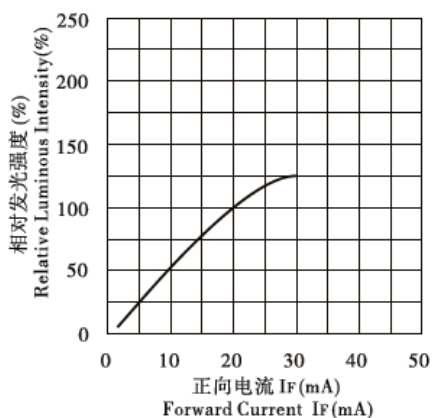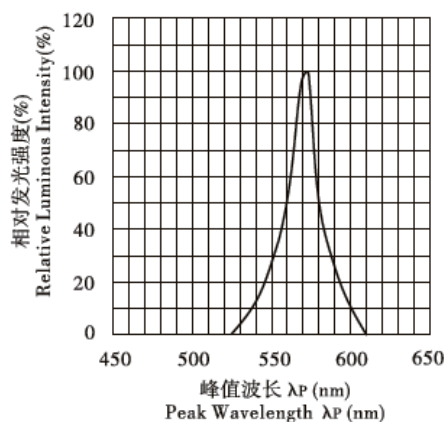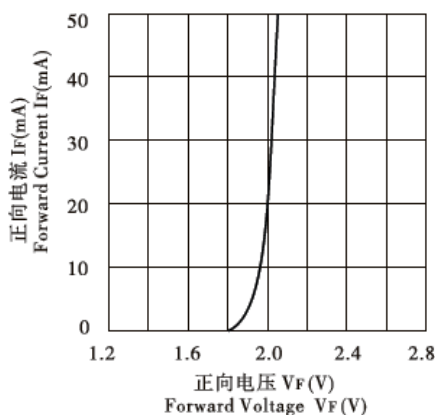

Opto Plus LED Corp.


OPL-3014YGT-30

3 mm Dia LED Lamp

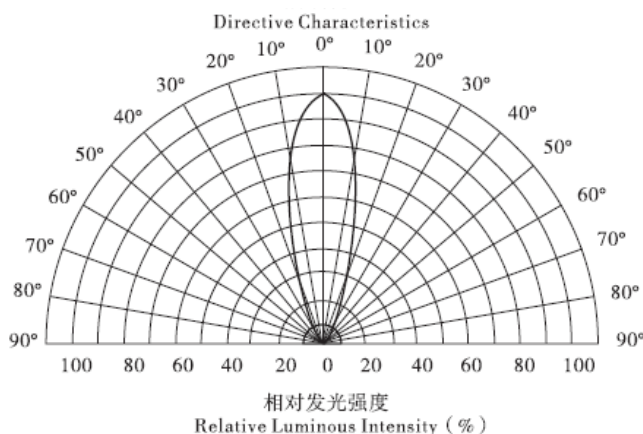

● RECOMMEND SOLDERING PROFILE

WAVE SOLDER PROFILE

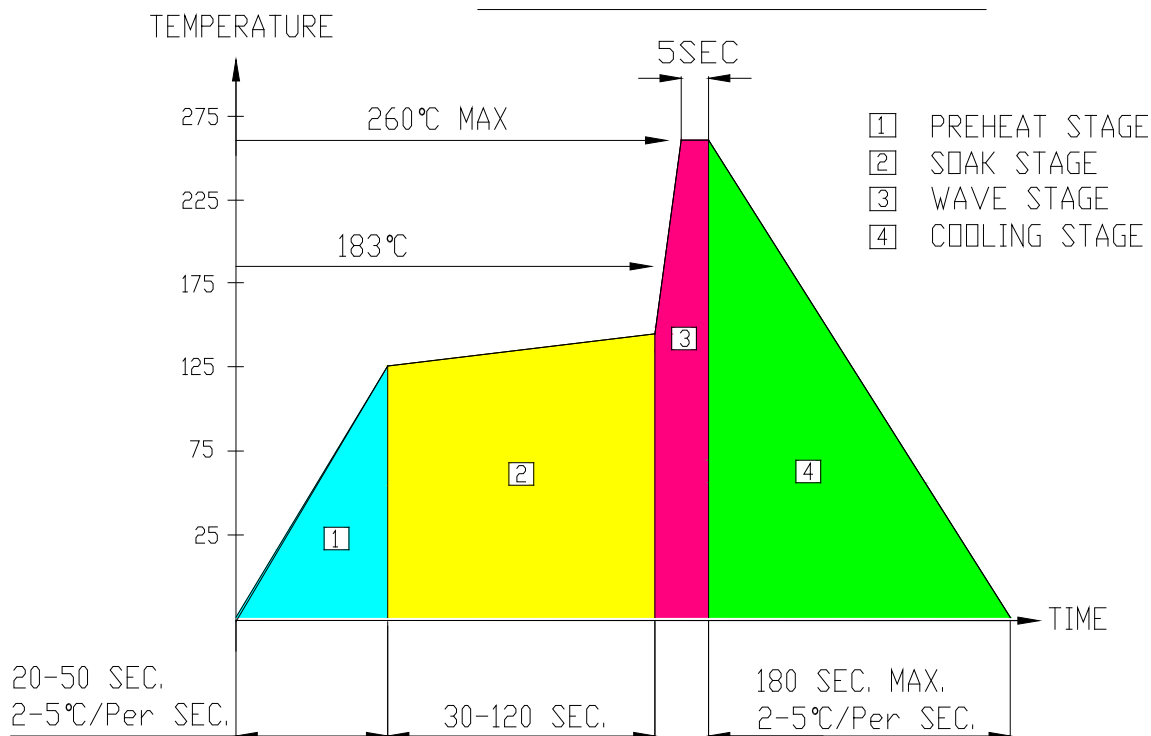

● Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass



Opto Plus LED Corp.

OPL-3014YGT-30

3 mm Dia LED Lamp

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C . If temperature is higher, time should be shorter ($+10^{\circ}\text{C} \rightarrow 1$ sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C .

● REWORK

Customer must finish rework within ≤ 3 sec under 350°C .
The head of soldering iron cannot touch copper foil.