



Opto Plus LED Corp.

OPL-5013LAC-30

5 mm Dia LED Lamp

● EDIT HISTORY

Version A : Feb. 17, 2021

Preliminary Spec.



Opto Plus LED Corp.

OPL-5013LAC-30

5 mm Dia LED Lamp

● FEATURES

- Low power consumption.
- High efficiency
- Round type
- With Flange
- Solder leads without stand-off
- Compliant with RoHs

● DESCRIPTION


- Chip Material : AlGaInP/GaAs
- Emitting Color : Ultra Amber
- Lens Color : Water Clear

● PACKAGE DIMENSIONS

Opto Plus LED Corp.

OPL-5013LAC-30

5 mm Dia LED Lamp

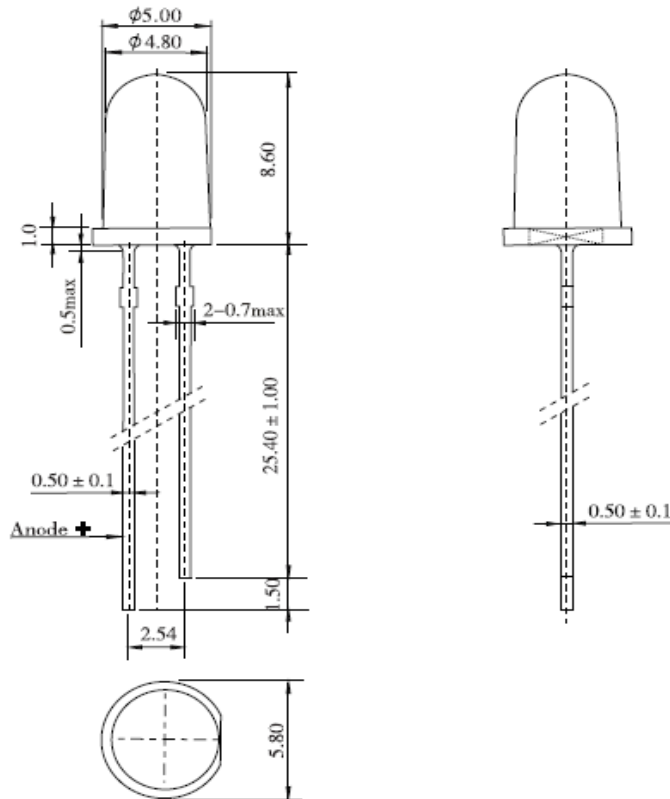

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.

● LA: SUPER BRIGHT AMBER (AlGaInP/GaAs)

ABSOLUTE MAXIMUM RATING AT Ta=25°C



Opto Plus LED Corp.

OPL-5013LAC-30

5 mm Dia LED Lamp

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P_{AD}	80	mW
Reverse voltage	V_R	5	V
Continuous forward current	I_{AF}	30	mA
Temperature coefficient	I/C	0.4	mA/°C
Pulse current	I_{PF}	100	mA
Operating temperature	T_{OPR}	-25 to +85	°C
Storage temperature	T_{STG}	-40 to +100	°C
Soldering Condition	T_{sd}	260°C/5set	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT $T_a=25^\circ\text{C}$

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward voltage	V_F	$I_F = 20\text{mA}$	-	2.0	2.4	V
Reverse current	I_R	$V_R = 5\text{V}$	-	-	50	μA
Peak wavelength	λ_P	$I_F = 20\text{mA}$	-	610	-	nm
Dominant wavelength	λ_D	$I_F = 20\text{mA}$	-	608	-	nm
Luminous intensity	I_V	$I_F = 20\text{mA}$	-	2000	-	mcd
Spectral radiation bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm
Viewing Angle	$2\theta_{1/2}$	$I_F = 20\text{mA}$	-	30	-	deg

● LA: SUPER BRIGHT AMBER (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves

Opto Plus LED Corp. 7F-3, No.496, Bannan Road, Jhonghe Dist., New Taipei City 235, Taiwan (R.O.C)
 Website: www.opledtw.com E-mail: sales@opledtw.com Tel: 886-2-2222-5698 Fax: 886-2-2222-2566






Disclaimer:
 Subject to change without notice

Opto Plus LED Corp.

OPL-5013LAC-30


5 mm Dia LED Lamp

(25 °C Free Air Temperature Unless Otherwise Specified)

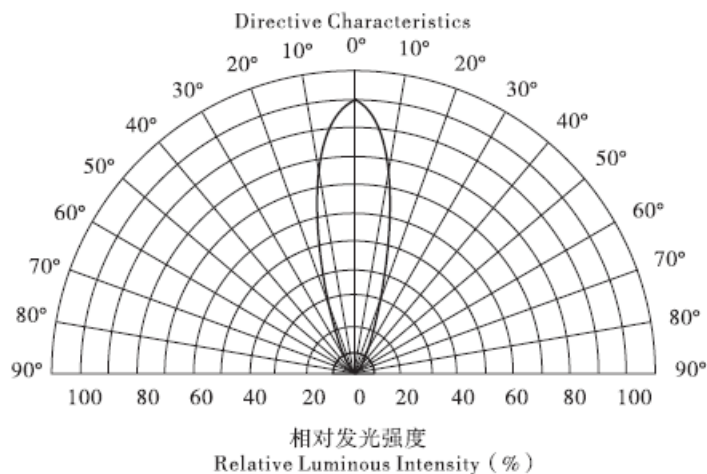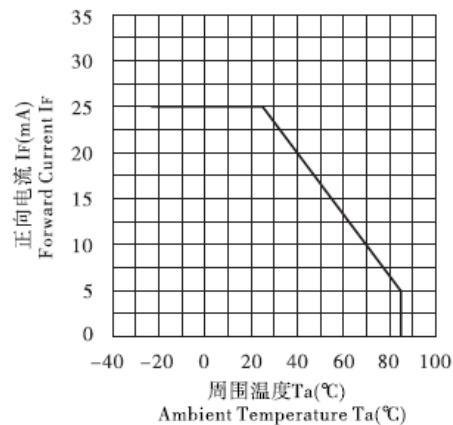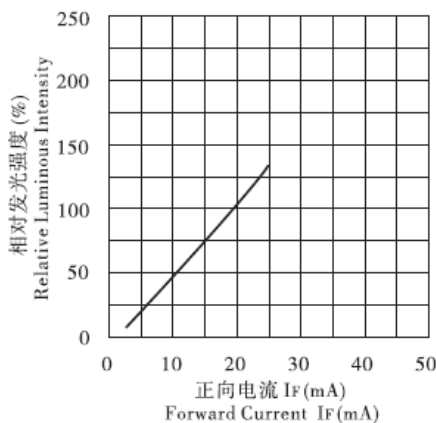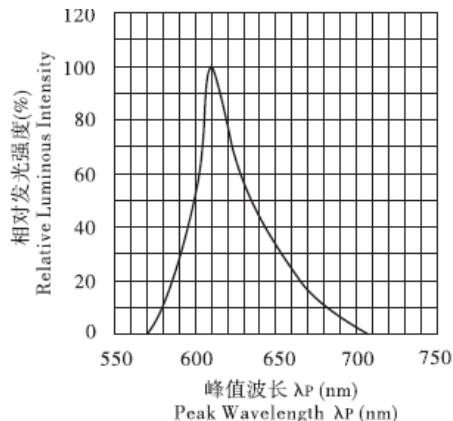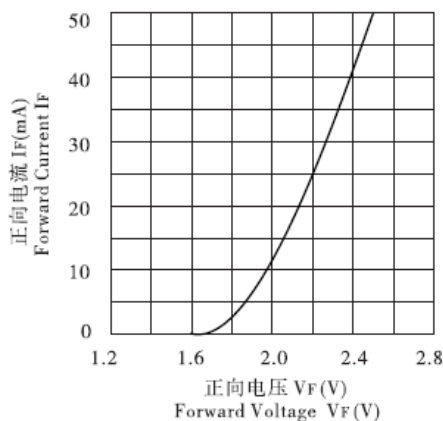

● RECOMMEND SOLDERING PROFILE

WAVE SOLDER PROFILE

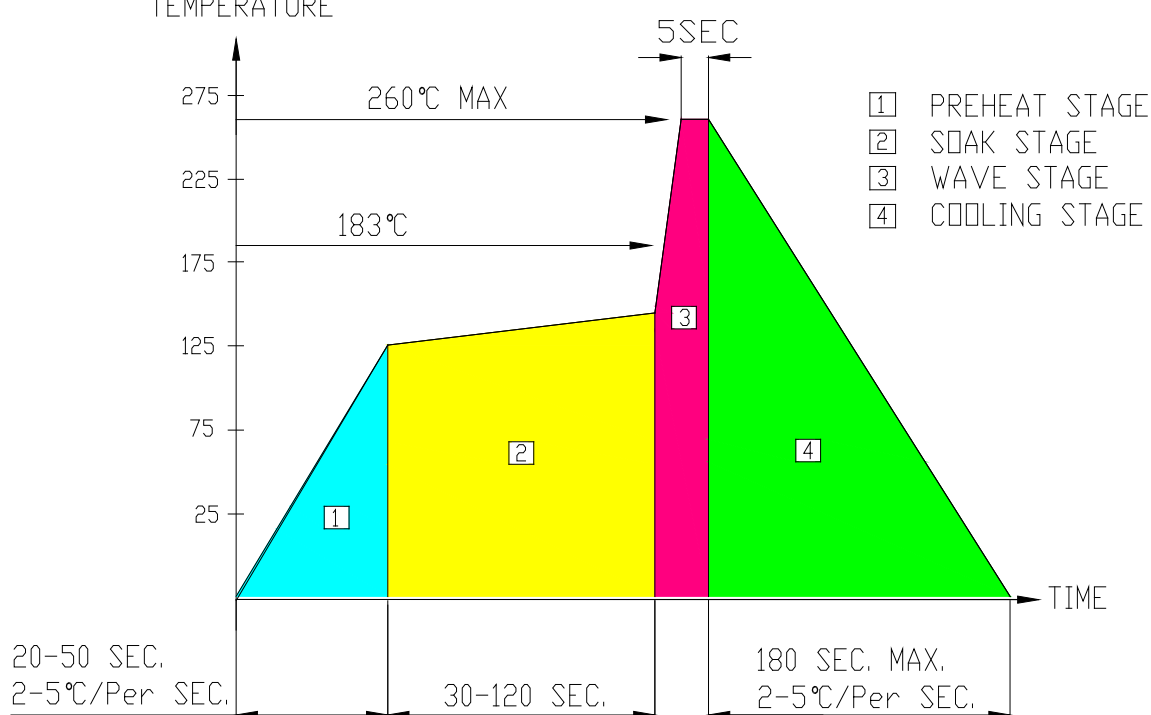

Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

REWORK

Customer must finish rework within ≤ 3 sec under 350°C.
The head of soldering iron cannot touch copper foil.