

www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-F3010SPG | OPS-F3011SPG

● **EDIT HISTORY**

Version A: May. 17, 2024

Preliminary Spec.



www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-F3010SPG | OPS-F3011SPG

● FEATURES

- 0.30 inch (7.62 mm) Digit Height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

● DESCRIPTION

The device are 0.30 inch (7.62 mm) height five digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Pure Green LED chip which are made from InGaN

On a transparent GaN, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE


PART NO.		DESCRIPTION
	OPS-F3010SPG-GW	Common Anode Gray face White segment
	OPS-F3011SPG-GW	Common Cathode Gray face White segment
	OPS-F3010SPG-BW	Common Anode Black face White segment
	OPS-F3011SPG-BW	Common Cathode Black face White segment

RoHS Compliance



Pb Free.







www.opledtw.com

Opto Plus LED Corp. 0.30" SMD Type LED Display OPS-F3010SPG | OPS-F3011SPG

MECHANICAL DIMENSIONS

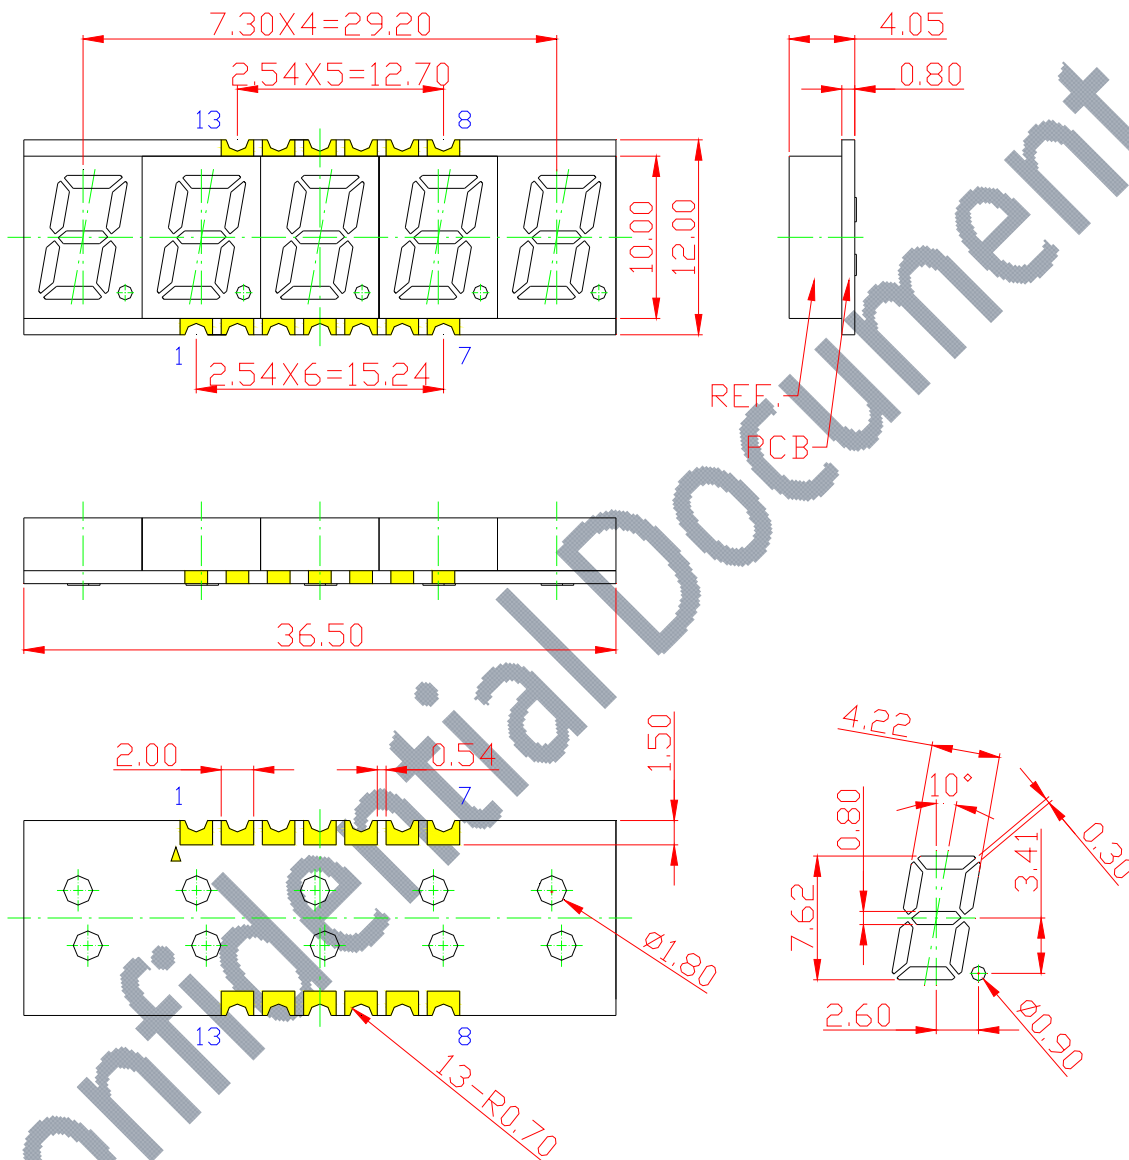

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.





www.opledtw.com



Opto Plus LED Corp. 0.30" SMD Type LED Display OPS-F3010SPG | OPS-F3011SPG

● TYPICAL INTERNAL EQUIVALENT CIRCUIT


Turn On Color

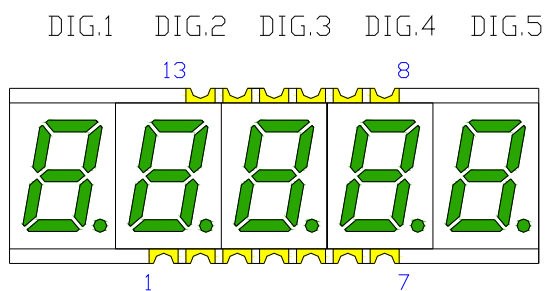

Recommended
Soldering Pattern

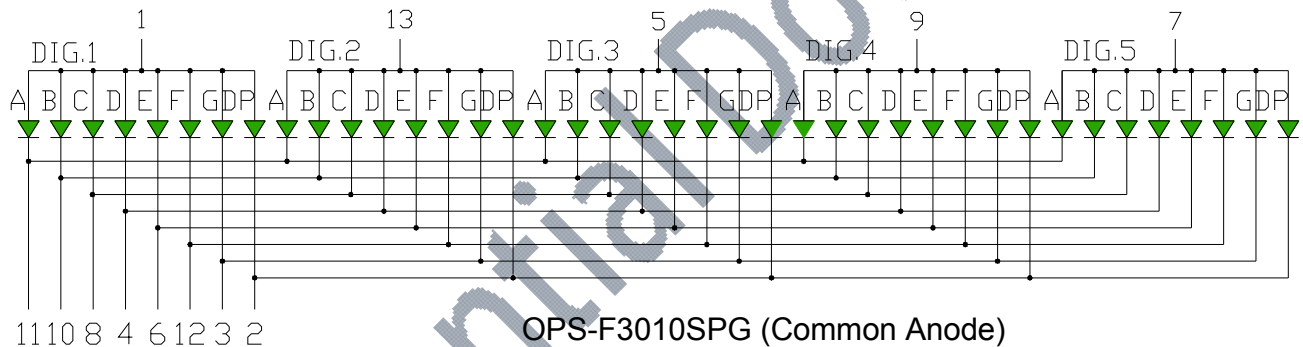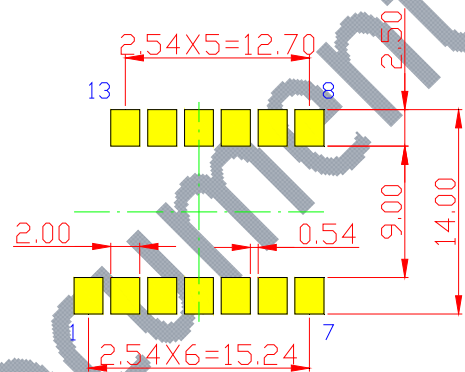

OPS-F3010SPG (Common Anode)

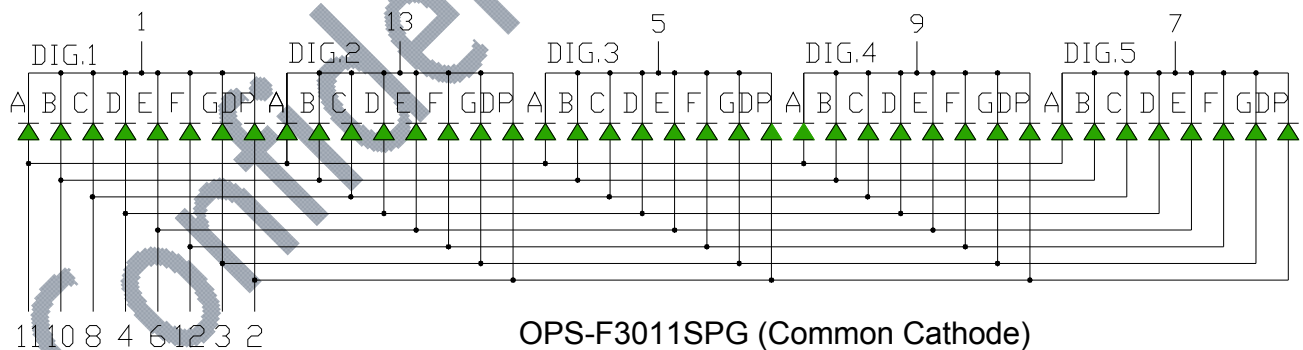

OPS-F3011SPG (Common Cathode)

※EMITTED COLOR : PURE GREEN



www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-F3010SPG | OPS-F3011SPG

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-F3010SPG-GW	Common Anode Gray face White segment
OPS-F3011SPG-GW	Common Cathode Gray face White segment
OPS-F3010SPG-BW	Common Anode Black face White segment
OPS-F3011SPG-BW	Common Cathode Black face White segment



www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-F3010SPG | OPS-F3011SPG

● **SPG: PURE GREEN (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	90	mW
Continuous forward current	I _{AF}	30	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	60	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max	Unit
Forward Voltage, (Per Dice)	V _F	I _F =20mA	-	3.0	3.4	V
Reverse Current, (Per Dice)	I _R	V _R =5V	-	-	10	μA
Dominant Wavelength	λ _D	I _F =20mA	515	-	530	nm
Luminous Intensity	I _v	I _F =20mA	140	207.5	275	mcd
Spectral Line Half-Bandwidth	Δλ	I _F =20mA	-	30	-	nm



www.opledtw.com

Opto Plus LED Corp.
0.30" SMD Type LED Display
OPS-F3010SPG | OPS-F3011SPG

● **SPG: BIN GRADE (Unit : mcd) 20mA**


PURE GREEN	R	S	T
	140.0 – 185.0	185.1 – 230.0	230.1 – 275.0

● **SPG: HUE GRADE (λ_D : nm)**

1	2	3
515.0 – 520.0	520.1 – 525.0	525.1 – 530.0

● **AVAILABLE BIN / HUE TABLE**

R1	S1	T1
R2	S2	T2
R3	S3	T3



www.opledtw.com

Opto Plus LED Corp.

0.30" SMD Type LED Display

OPS-F3010SPG | OPS-F3011SPG

● SPG: PURE GREEN (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

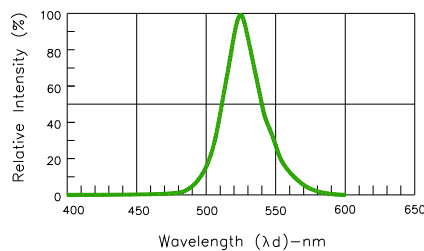


Fig. 1- Relative Intensity VS. Wavelength

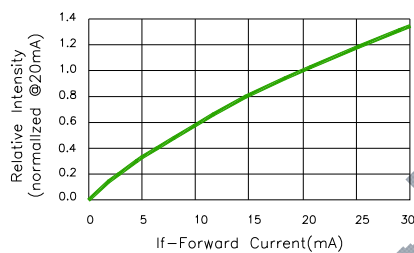


Fig. 2-Relative Luminous Intensity vs. Forward Current

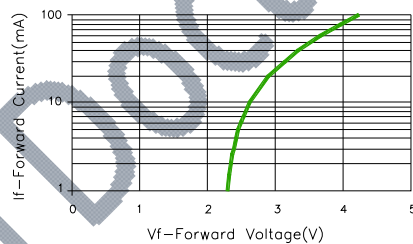


Fig. 3-Forward Current vs. Forward Voltage

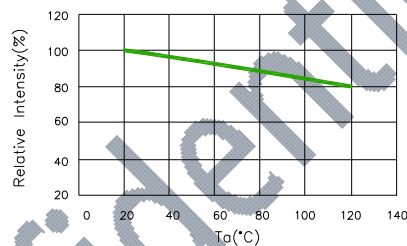


Fig. 4-Relative Intensity(@20mA)VS. Ambient Temperature

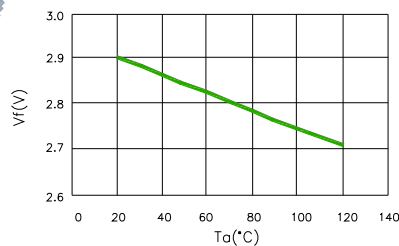


Fig. 5-Forward Voltage(@20mA)VS. Ambient Temperature

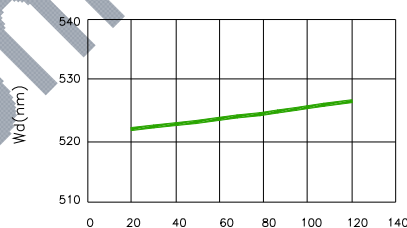


Fig. 6-Dominant Wavelength(@20mA)
VS. Ambient Temperature


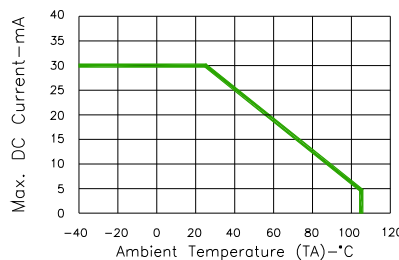


Fig. 7-Max. Allowable DC Current
VS. Ambient Temperature




www.opledtw.com

Opto Plus LED Corp. 0.30" SMD Type LED Display OPS-F3010SPG | OPS-F3011SPG

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

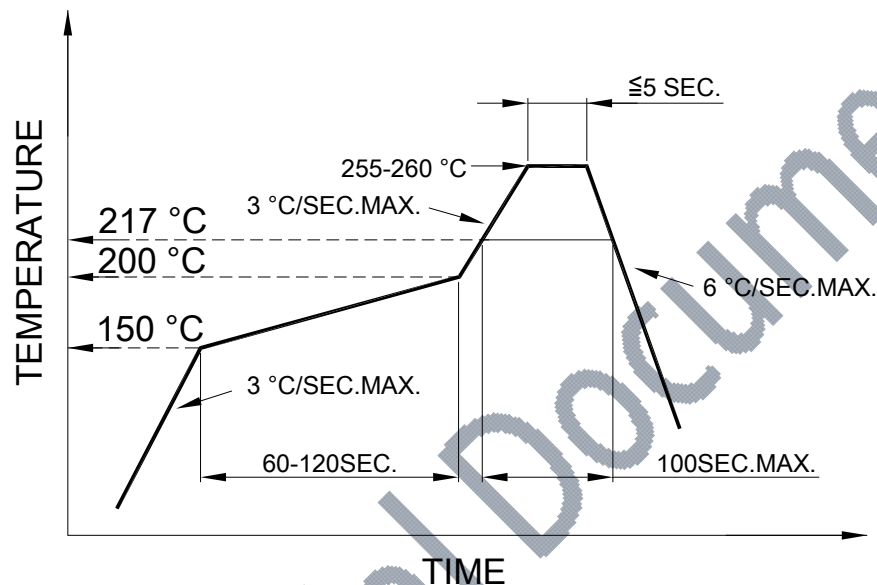


- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤4 sec when 260°C. If temperature is higher, time should be shorter (+10°C→1 sec). Power dissipation of Iron should be smaller Than 15W, and temperature should be controllable. Surface temperature Of the device should be under 230°C.

● REWORK


- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.




www.opledtw.com

Opto Plus LED Corp. 0.30" SMD Type LED Display OPS-F3010SPG | OPS-F3011SPG

● REEL DIMENSIONS

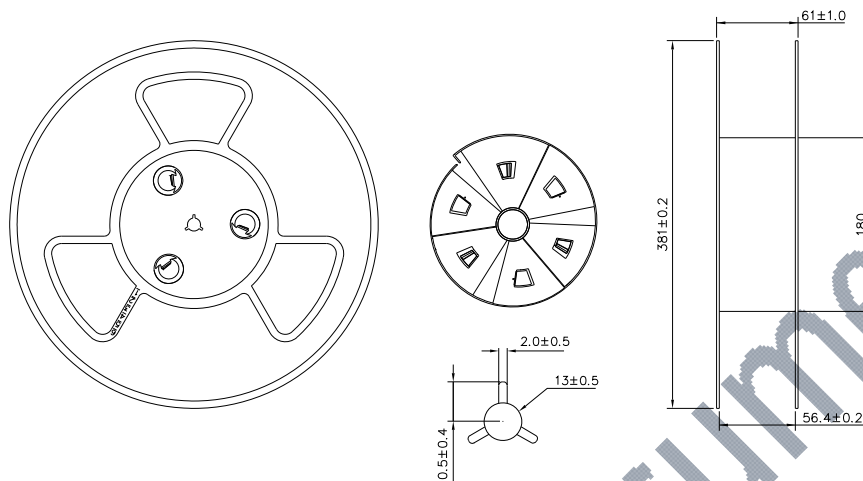

● PACKING & LABEL SPECIFICATIONS

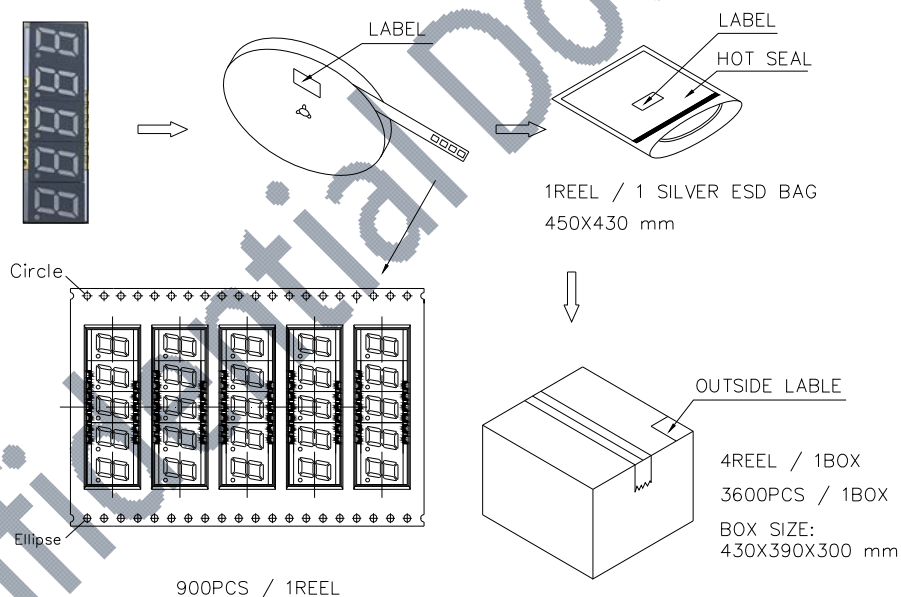

● STORAGE CONDITION

In factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION
5°C ~ 30°C	Below 60%RH

After opened and not in factory original sealed bag package

TEMPERATURE CONDITION	HUMIDITY CONDITION	STORAGE TIME
5°C ~ 30°C	Below 60%RH	Within 4 weeks (MSL as level 2a)