



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**Case Mold Type LED Display**  
**OPD-B123010LE**

● **EDIT HISTORY**

Version A : Nov. 04, 2020

Preliminary Spec.



## Opto Plus LED Corp. Case Mold Type LED Display OPD-B123010LE

### ● FEATURES

- Large segments, closely spaced.
- Low current operation.
- Case mold type.
- RoHS compliant, Pb Free.

### ● DESCRIPTION

The device are 30.4mm X 10.1mm 12 rectangular light sources array display.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Red LED chip which are made from AlGaInP on a transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

### ● DEVICE

PART NO.	DESCRIPTION
OPD-B123010LE-GW	Common Anode   Gray face   White segment
OPD-B123010LE-BW	Common Anode   Black face   White segment

### RoHS Compliance




### Pb Free.





# Opto Plus LED Corp. Case Mold Type LED Display OPD-B123010LE



## ● MECHANICAL DIMENSIONS

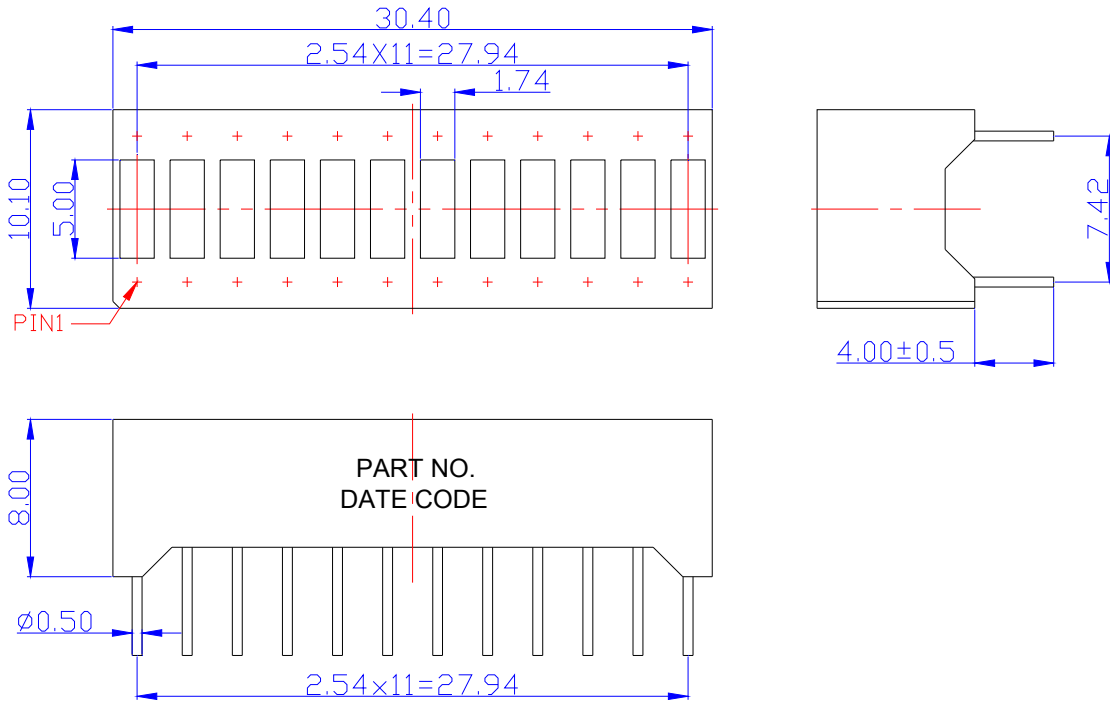

NOTES: Dimension is in millimeters. Tolerance is  $\pm 0.25$  mm unless otherwise noted.

## ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

Turn On Color

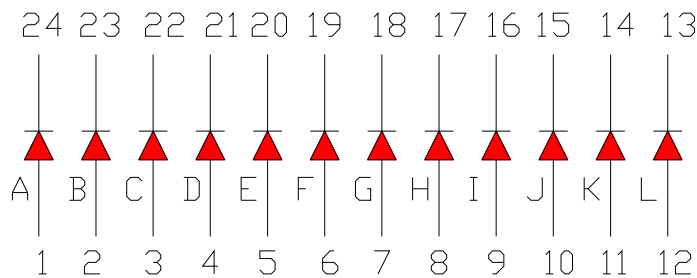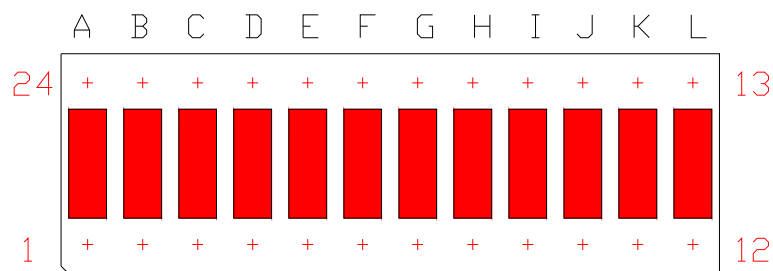

※EMITTED COLOR : SUPER BRIGHT RED



## Opto Plus LED Corp. Case Mold Type LED Display OPD-B123010LE

● **LE: SUPER BRIGHT RED (AlGaInP/GaAs)**  
ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	$P_{AD}$	48	mW
Continuous forward current	$I_{AF}$	20	mA
Peak current (duty cycle 1/10, 1kHz)	$I_{PF}$	40	mA
Reverse voltage	$V_R$	5	V
Operating temperature	$T_{OPR}$	-40 to +85	°C
Storage temperature	$T_{STG}$	-40 to +85	°C

### ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C



Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage	$V_F$	$I_F = 20\text{mA}$	-	2.1	2.4	V
Reverse Current	$I_R$	$V_R = 5\text{V}$	-	-	10	$\mu\text{A}$
Peak Wavelength	$\lambda_P$	$I_F = 20\text{mA}$	-	632	-	nm
Dominant Wavelength	$\lambda_D$	$I_F = 20\text{mA}$	619	624	629	nm
Luminous Intensity	$I_V$	$I_F = 20\text{mA}$	-	60	-	mcd
Spectral Line Half-Bandwidth	$\Delta\lambda$	$I_F = 20\text{mA}$	-	20	-	nm



## Opto Plus LED Corp. Case Mold Type LED Display OPD-B123010LE

### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

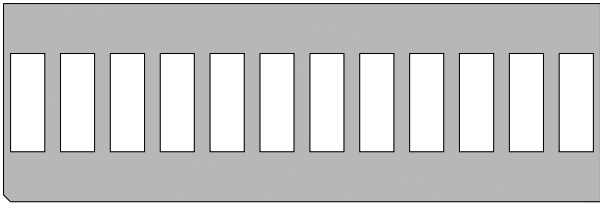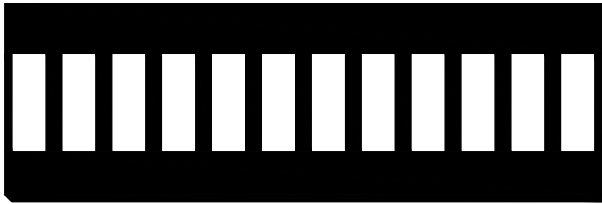-GW	-BW
	
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPD-B123010LE-GW	Common Anode   Gray face   White segment
OPD-B123010LE-BW	Common Anode   Black face   White segment



# Opto Plus LED Corp.

## Case Mold Type LED Display

### OPD-B123010LE

#### ● LE: SUPER BRIGHT RED (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

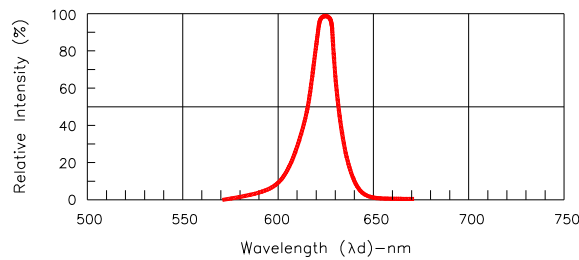


Fig.1-Relative Intensity VS. Wavelength

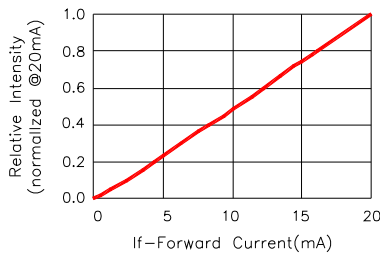


Fig.2-Relative Luminous Intensity vs. Forward Current

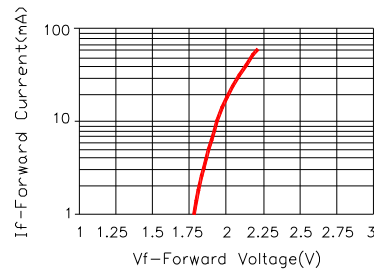


Fig.3-Forward Current vs. Forward Voltage

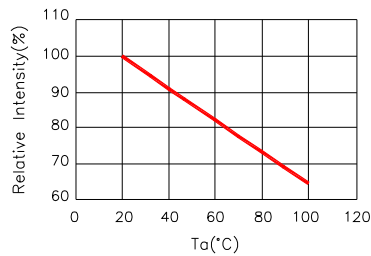


Fig.4-Relative Intensity(@20mA) vs. Ambient Temperature

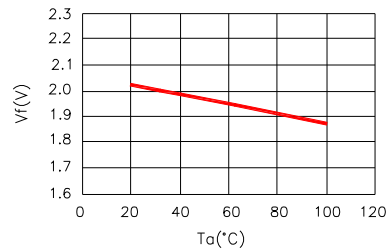


Fig.5-Forward Voltage(@20mA) vs. Ambient Temperature

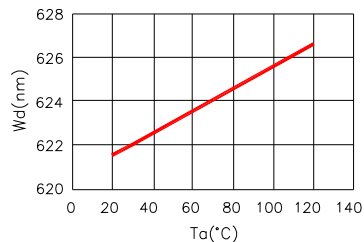


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature


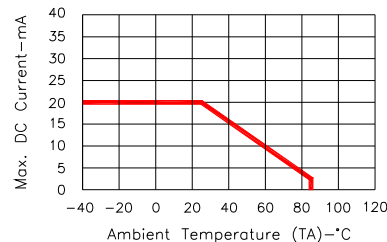


Fig.7-Max. Allowable DC Current VS. Ambient Temperature

● **RECOMMEND SOLDERING PROFILE**

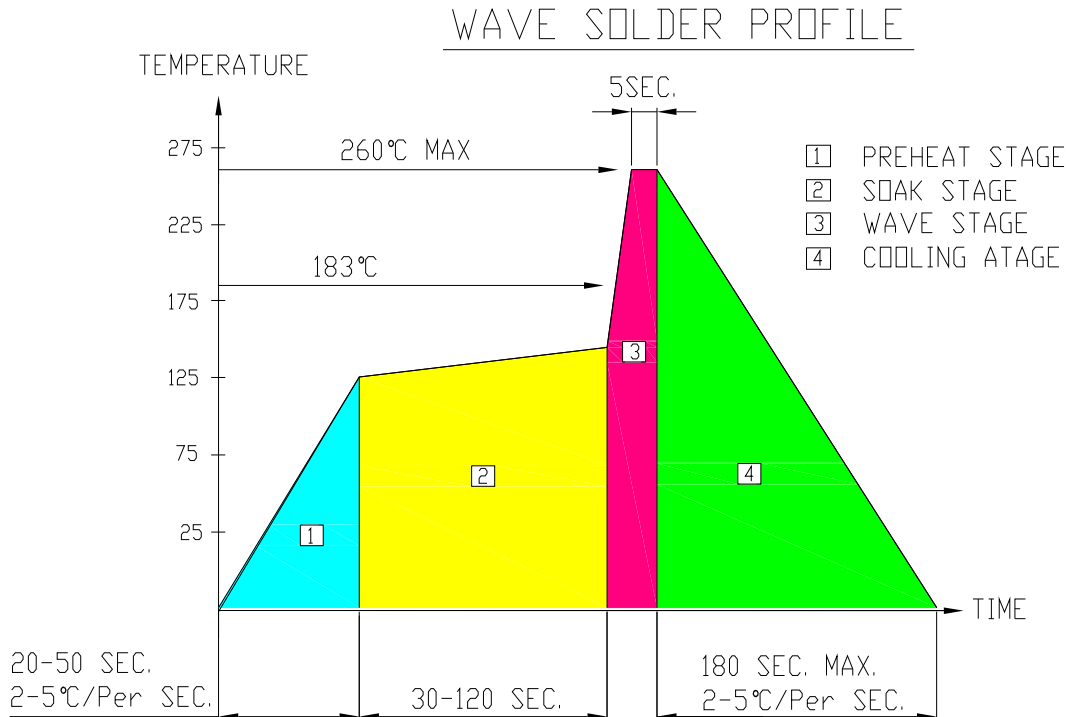

● **Note:**

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

● **SOLDERING IRON**

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

● **REWORK**

Customer must finish rework within  $\leq 3$  sec under 350°C.  
 The head of soldering iron cannot touch copper foil.