



[www.opledtw.com](http://www.opledtw.com)

**Opto Plus LED Corp.**  
**1.22" 8 x 8 Dot Matrix LED Display**  
**OPD-M38810LB | OPD- M38811LB**

● **EDIT HISTORY**

Version A: Nov. 04, 2020

Preliminary Spec.



**Opto Plus LED Corp.**  
**1.22” 8 x 8 Dot Matrix LED Display**  
**OPD-M38810LB | OPD- M38811LB**

● **FEATURES**

- 1.22 inch (31.0 mm) Matrix Height.
- Stackable vertically and horizontally.
- 8x8 array with X-Y select.
- Wide viewing angle
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The device are 1.22 inch (31.0 mm) 8x8 dot matrix display.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Bright Blue LED chip which are made from InGaN on a transparent GaN.substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● **DEVICE**

| PART NO.        | DESCRIPTION                                 |
|-----------------|---|
| OPD-M38810LB-GW | Common Anode   Gray face   White segment    |
| OPD-M38811LB-GW | Common Cathode   Gray face   White segment  |
| OPD-M38810LB-BW | Common Anode   Black face   White segment   |
| OPD-M38811LB-BW | Common Cathode   Black face   White segment |

**RoHS Compliance**



**Pb Free.**






# Opto Plus LED Corp.

## 1.22" 8 x 8 Dot Matrix LED Display

### OPD-M38810LB | OPD- M38811LB




#### ● MECHANICAL DIMENSIONS

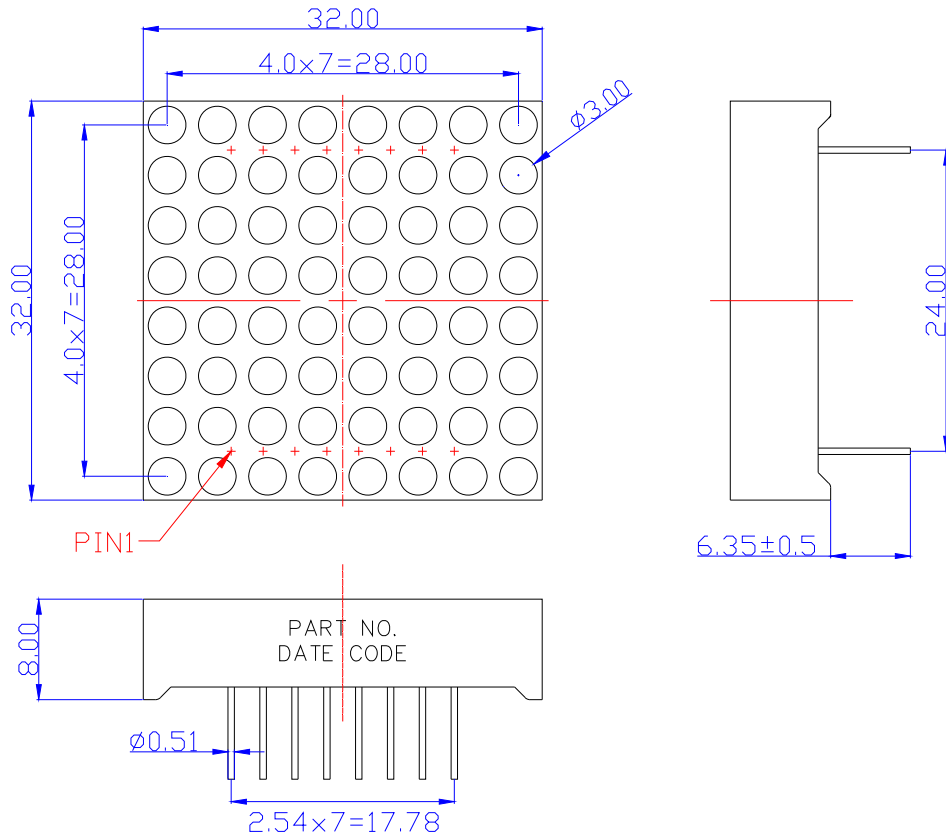

NOTES: Dimension is in millimeters. Tolerance is  $\pm 0.25$  mm unless otherwise noted.

#### ● TYPICAL INTERNAL EQUIVALENT CIRCUIT

Turn On Color

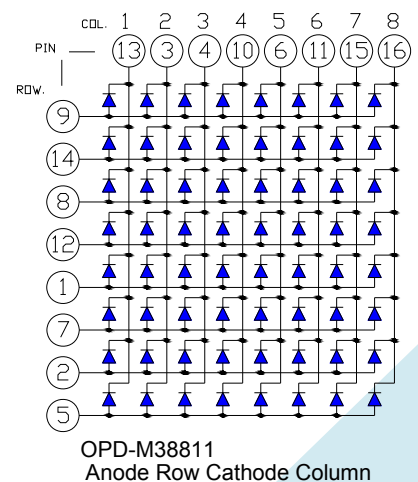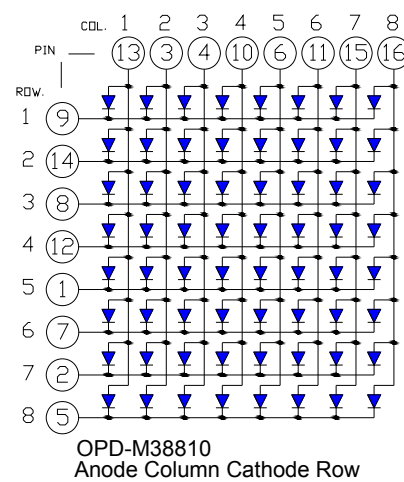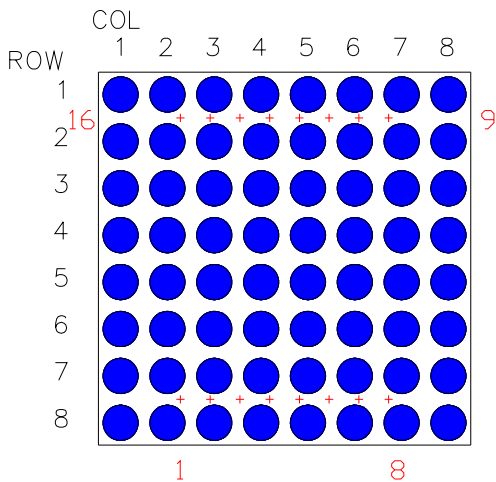

※EMITTED COLOR : SUPER BRIGHT BLUE



**Opto Plus LED Corp.**  
**1.22" 8 x 8 Dot Matrix LED Display**  
**OPD-M38810LB | OPD- M38811LB**

● **LB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

| Parameter                            | Symbol    | Maximum Rating | Unit |
|--------------------------------------|-----------|----------------|------|
| Power dissipation                    | $P_{AD}$  | 68             | mW   |
| Continuous forward current           | $I_{AF}$  | 20             | mA   |
| Peak current (duty cycle 1/10, 1kHz) | $I_{PF}$  | 60             | mA   |
| Reverse voltage                      | $V_R$     | 5              | V    |
| Operating temperature                | $T_{OPR}$ | -40 to +85     | °C   |
| Storage temperature                  | $T_{STG}$ | -40 to +85     | °C   |

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

| Characteristic               | Symbol          | Condition           | Min. | Type. | Max. | Unit          |
|------------------------------|-----------------|---------------------|------|-------|------|---------------|
| Forward Voltage              | $V_F$           | $I_F = 20\text{mA}$ | -    | 3.0   | 3.4  | V             |
| Reverse Current              | $I_R$           | $V_R = 5\text{V}$   | -    | -     | 10   | $\mu\text{A}$ |
| Dominant Wavelength          | $\lambda_D$     | $I_F = 20\text{mA}$ | 460  | 465   | 474  | nm            |
| Luminous Intensity           | $I_V$           | $I_F = 20\text{mA}$ | -    | 70    | -    | mcd           |
| Spectral Line Half-Bandwidth | $\Delta\lambda$ | $I_F = 20\text{mA}$ | -    | 20    | -    | nm            |





## Opto Plus LED Corp.

### 1.22" 8 x 8 Dot Matrix LED Display

### OPD-M38810LB | OPD- M38811LB

#### ● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

| -GW   | -BW  |
|---|--|
|  |  |
| ※ REFLECTOR COLOR: Gray<br>※ SEGMENT COLOR: White                                 | ※ REFLECTOR COLOR: Black<br>※ SEGMENT COLOR: White                                 |

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit [www.opledtw.com](http://www.opledtw.com) or contact [sales@opledtw.com](mailto:sales@opledtw.com) for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

| PART NO.        | DESCRIPTION                                 |
|-----------------|---|
| OPD-M38810LB-GW | Common Anode   Gray face   White segment    |
| OPD-M38811LB-GW | Common Cathode   Gray face   White segment  |
| OPD-M38810LB-BW | Common Anode   Black face   White segment   |
| OPD-M38811LB-BW | Common Cathode   Black face   White segment |



# Opto Plus LED Corp.

## 1.22" 8 x 8 Dot Matrix LED Display

### OPD-M38810LB | OPD- M38811LB

#### ● LB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves  
(25 °C Free Air Temperature Unless Otherwise Specified)

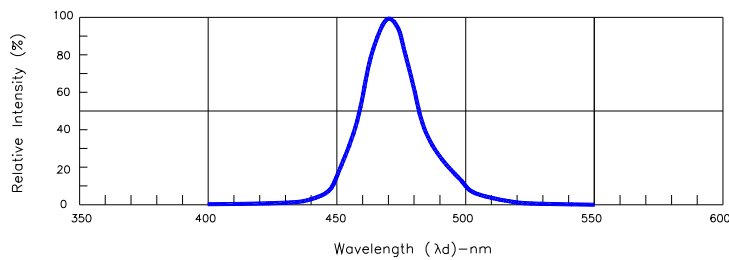


Fig.1-Relative Intensity VS. Wavelength

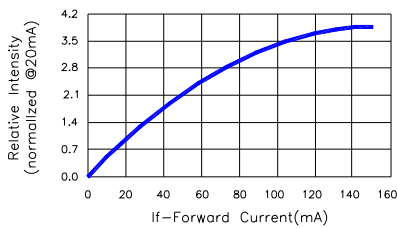


Fig.2-Relative Luminous Intensity vs. Forward Current

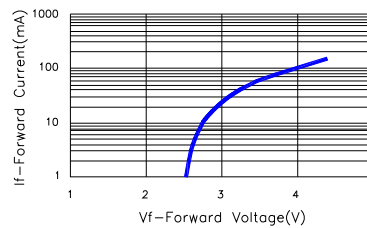


Fig.3-Forward Current vs. Forward Voltage

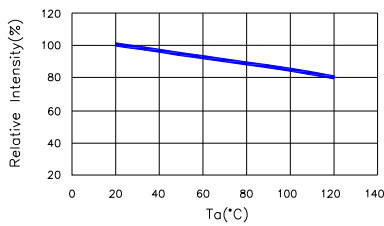


Fig.4-Relative Intensity(@20mA)VS. Ambient Temperature

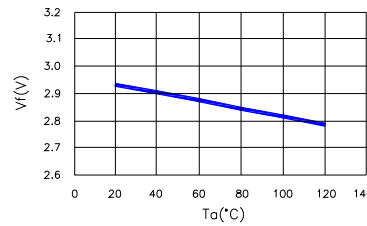


Fig.5-Forward Voltage(@20mA)VS. Ambient Temperature

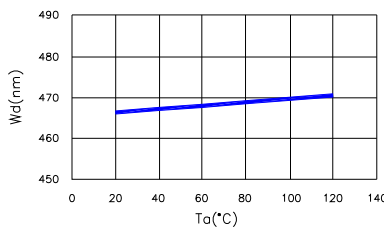


Fig.6-Dominant Wavelength(@20mA) VS. Ambient Temperature

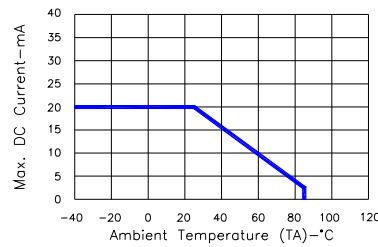


Fig.7-Max. Allowable DC Current VS. Ambient Temperature




# Opto Plus LED Corp.

## 1.22" 8 x 8 Dot Matrix LED Display

### OPD-M38810LB | OPD- M38811LB

## ● RECOMMEND SOLDERING PROFILE

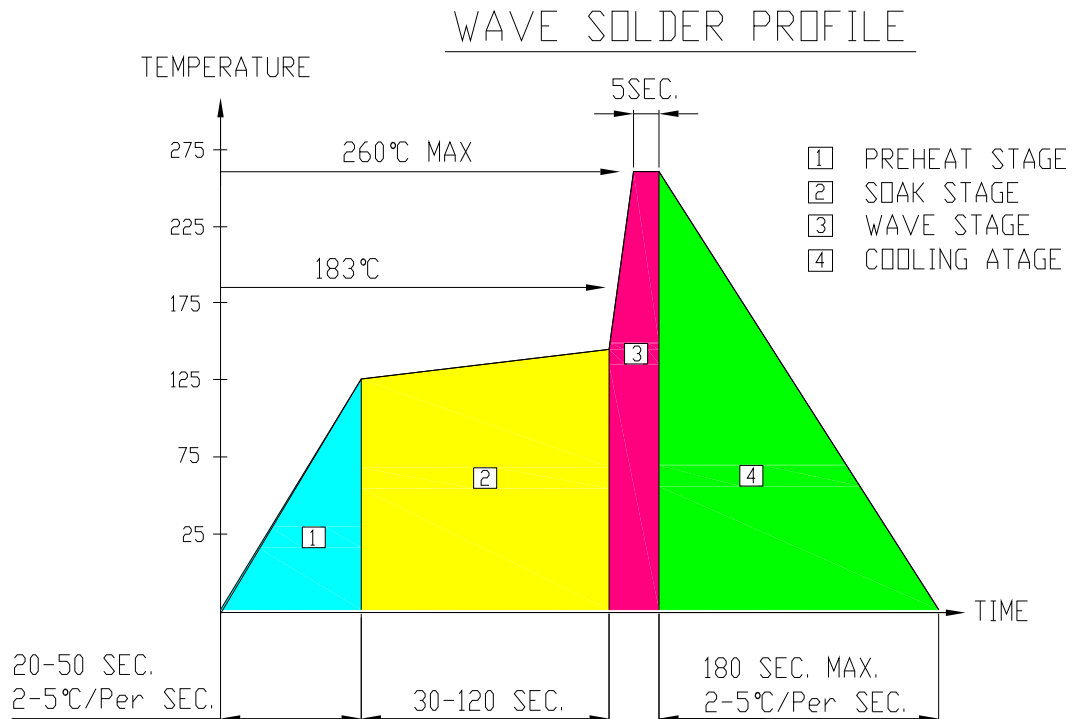

## ● Note:

- Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- Peak wave soldering temperature between 245°C ~ 225°C for 3 sec (5 sec max)
- No more than one wave soldering pass

## ● SOLDERING IRON

Basic spec is  $\leq 4$  sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230°C.

## ● REWORK

Customer must finish rework within  $\leq 3$  sec under 350°C.  
The head of soldering iron cannot touch copper foil.