

www.opledtw.com

Opto Plus LED Corp.
0.80" SMD Type LED Display
OPS-T8016LR | OPS-T8017LR

● **EDIT HISTORY**

Version A: Jun. 04, 2025

Preliminary Spec.



Opto Plus LED Corp. 0.80" SMD Type LED Display OPS-T8016LR | OPS-T8017LR

● FEATURES

- 0.80 inch (20.28 mm) digit height.
- SMD type.
- Low current operation.
- RoHS Compliant, Pb Free.

● DESCRIPTION

The device are 0.80 inch (20.28 mm) height triple digit 7-segment displays.

The device is Opto Plus LED Corp standard LED Display.

This device utilizes Super Red LED chip which are made from AlGaInP on a Transparent GaAs, substrate.

The device has face and segment option, please refer to **PRODUCT APPEARANCE**.

● DEVICE

PART NO.	DESCRIPTION
OPS-T8016LR-GW	Common Anode Gray face White segment
OPS-T8017LR-GW	Common Cathode Gray face White segment
OPS-T8016LR-BW	Common Anode Black face White segment
OPS-T8017LR-BW	Common Cathode Black face White segment


RoHS Compliance



Pb Free.



● MECHANICAL DIMENSIONS

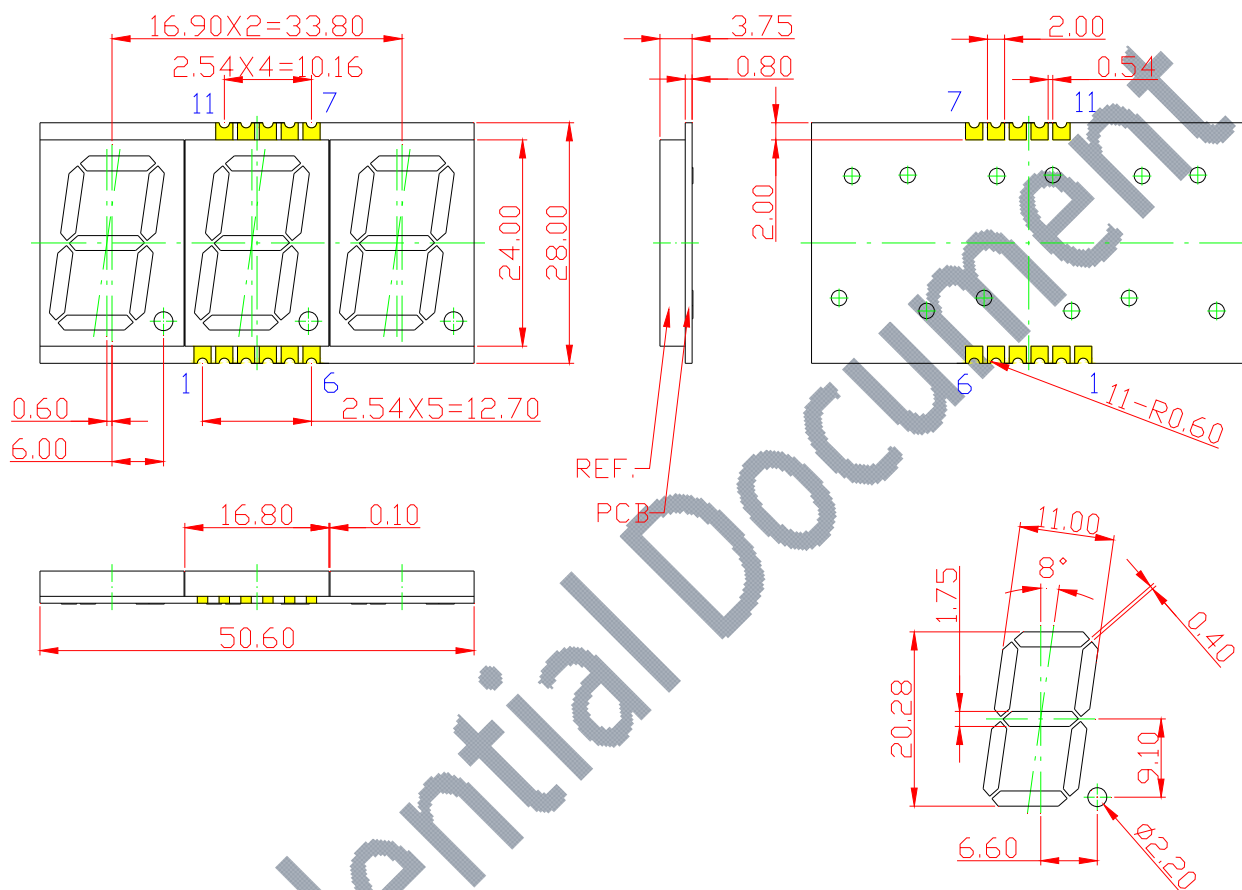

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm unless otherwise noted.




Opto Plus LED Corp.

0.80" SMD Type LED Display

OPS-T8016LR | OPS-T8017LR

● TYPICAL INTERNAL EQUIVALENT CIRCUIT

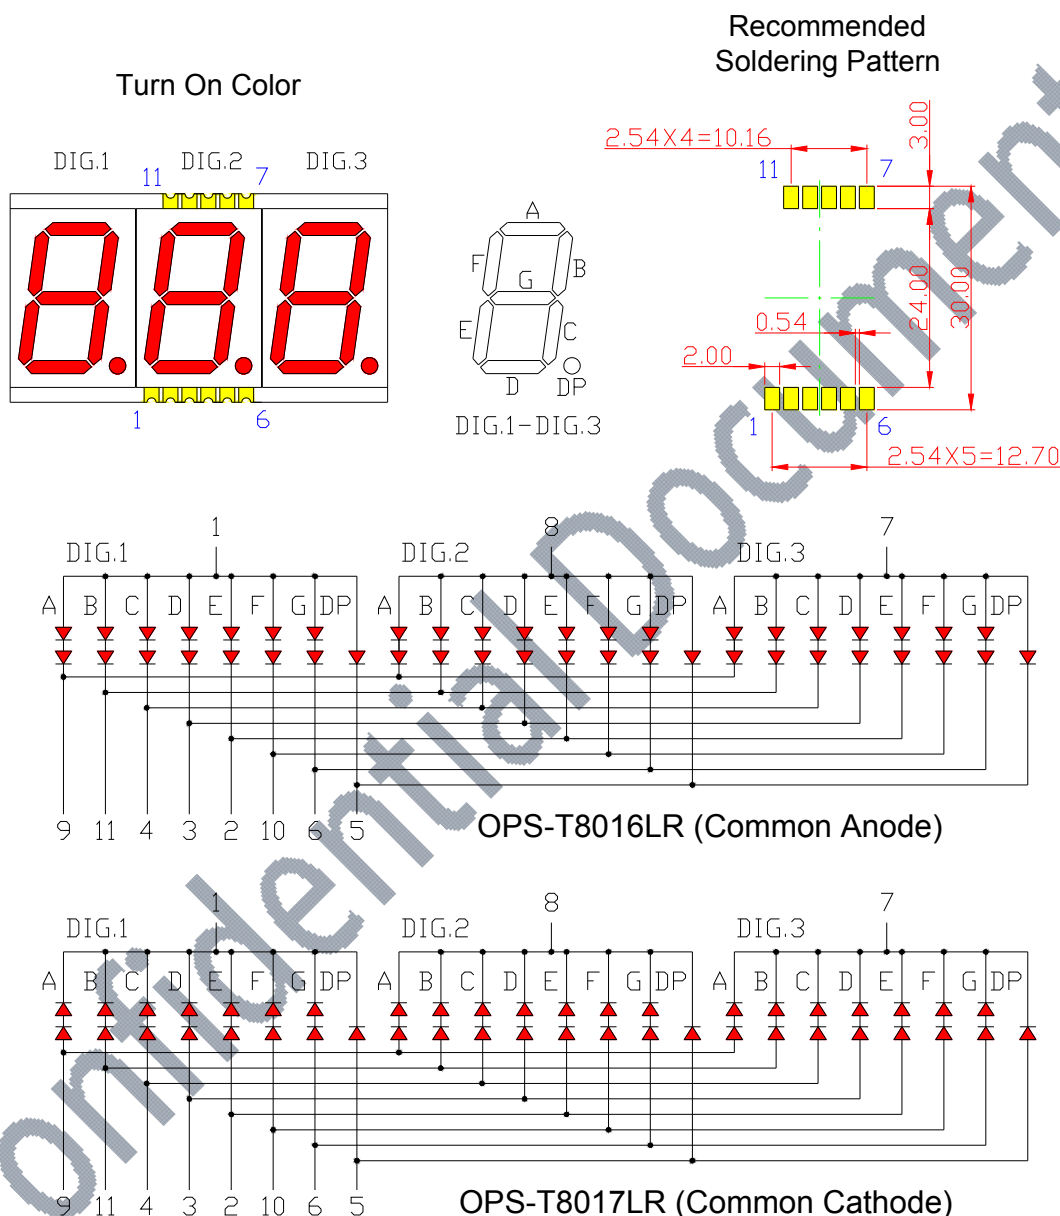

※EMITTED COLOR : SUPER RED



www.opledtw.com

Opto Plus LED Corp. 0.80" SMD Type LED Display OPS-T8016LR | OPS-T8017LR

● PRODUCT APPEARANCE

The most common reflector color and segment color are show in below diagram.

-GW	-BW
※ REFLECTOR COLOR: Gray ※ SEGMENT COLOR: White	※ REFLECTOR COLOR: Black ※ SEGMENT COLOR: White

Opto Plus can customize reflector and segment colors by customer's request. If you have these request please visit www.opledtw.com or contact sales@opledtw.com for more **Standard Product Customization** information.

Part NO. related to reflector and segment colors show as table below.

PART NO.	DESCRIPTION
OPS-T8016LR-GW	Common Anode Gray face White segment
OPS-T8017LR-GW	Common Cathode Gray face White segment
OPS-T8016LR-BW	Common Anode Black face White segment
OPS-T8017LR-BW	Common Cathode Black face White segment



Opto Plus LED Corp.
0.80" SMD Type LED Display
OPS-T8016LR | OPS-T8017LR

● **LR: SUPER RED (AlGaInP/GaAs)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	48	mW
Continuous forward current	I _{AF}	20	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	40	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F = 20mA	-	2.1	2.4	V
Reverse Current, (Per Dice)	I _R	V _R = 5V	-	-	10	μA
Peak Wavelength	λ _P	I _F = 20mA	-	650	-	nm
Dominant Wavelength	λ _D	I _F = 20mA	635	-	648	nm
Luminous Intensity	I _V	I _F = 20mA	5	-	20	mcd
Spectral Line Half-Bandwidth	Δλ	I _F = 20mA	-	20	-	nm



Opto Plus LED Corp.
0.80" SMD Type LED Display
OPS-T8016LR | OPS-T8017LR

- LR: BIN GRADE (Unit : mcd) 20mA

Super Red	H	I	J
	5.0 - 10.0	10.1 - 15.0	15.1 - 20.0

- LR: HUE GRADE (λ_D : nm)

1	2	3
635.0 – 640.0	640.1 – 644.0	644.1 – 648.0

- AVAILABLE BIN / HUE TABLE

H1	I1	J1
H2	I2	J2
H3	I3	J3



Opto Plus LED Corp.

0.80" SMD Type LED Display

OPS-T8016LR | OPS-T8017LR

● LR: SUPER RED (AlGaInP/GaAs) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

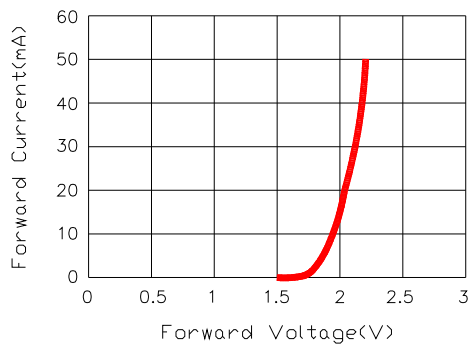


Fig.1 FORWARD CURRENT VS. FORWARD VOLTAGE

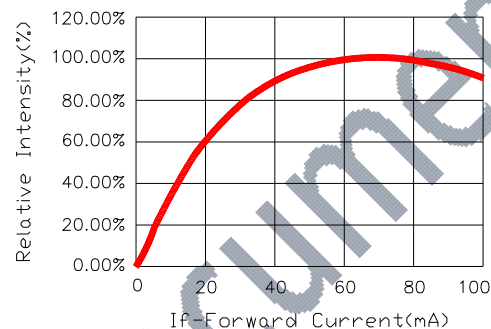


Fig.2 RELATIVE INTENSITY VS. FORWARD CURRENT

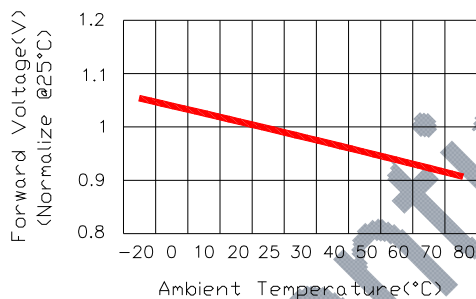


Fig.3 FORWARD VOLTAGE VS. TEMPERATURE

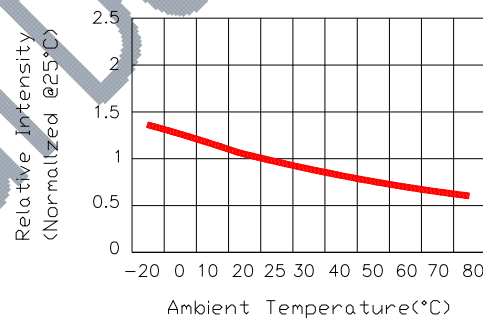


Fig.4 RELATIVE INTENSITY VS. TEMPERATURE

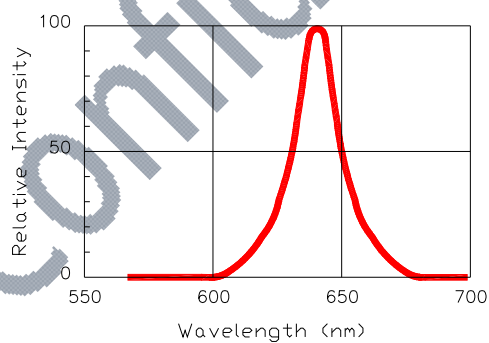


Fig.5 RELATIVE INTENSITY VS. WAVELENGTH


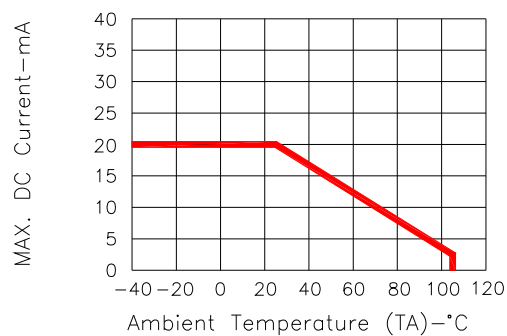


Fig.6 MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE

● SMT REFLOW SOLDERING INSTRUCTIONS

SMT Soldering Profile

Pb free reflow soldering Profile

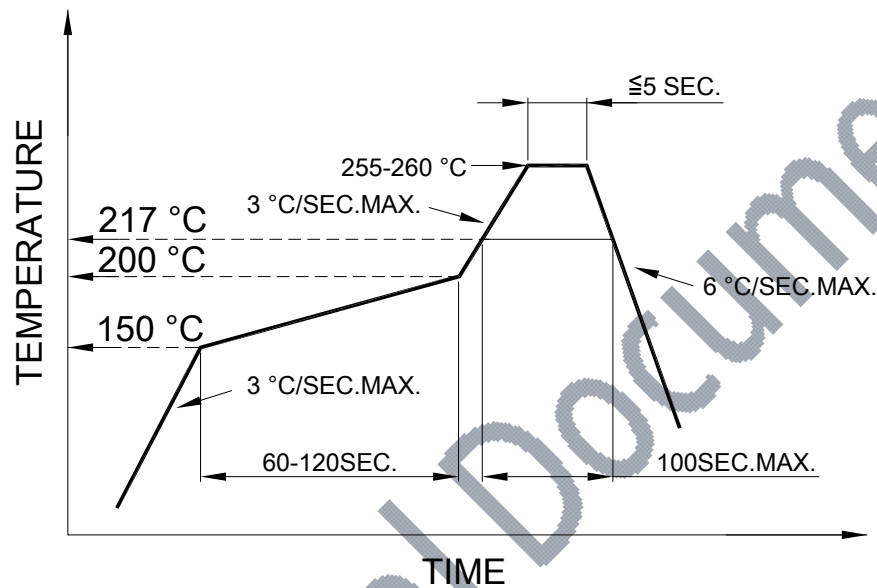

- We recommend the reflow temperature 245°C (+/- 5°C).
The maximum soldering temperature should be limited to 260°C.
- Number of reflow process shall be 2 times or less.

● SOLDERING IRON

Basic spec is ≤ 4 sec when 260°C. If temperature is higher, time should be shorter (+10°C → 1 sec). Power dissipation of Iron should be smaller Than 15W, and temperature should be controllable. Surface temperature Of the device should be under 230°C.

● REWORK

- Customer must finish rework within 3 sec. under 350°C.
- The head of soldering iron cannot touch copper foil.